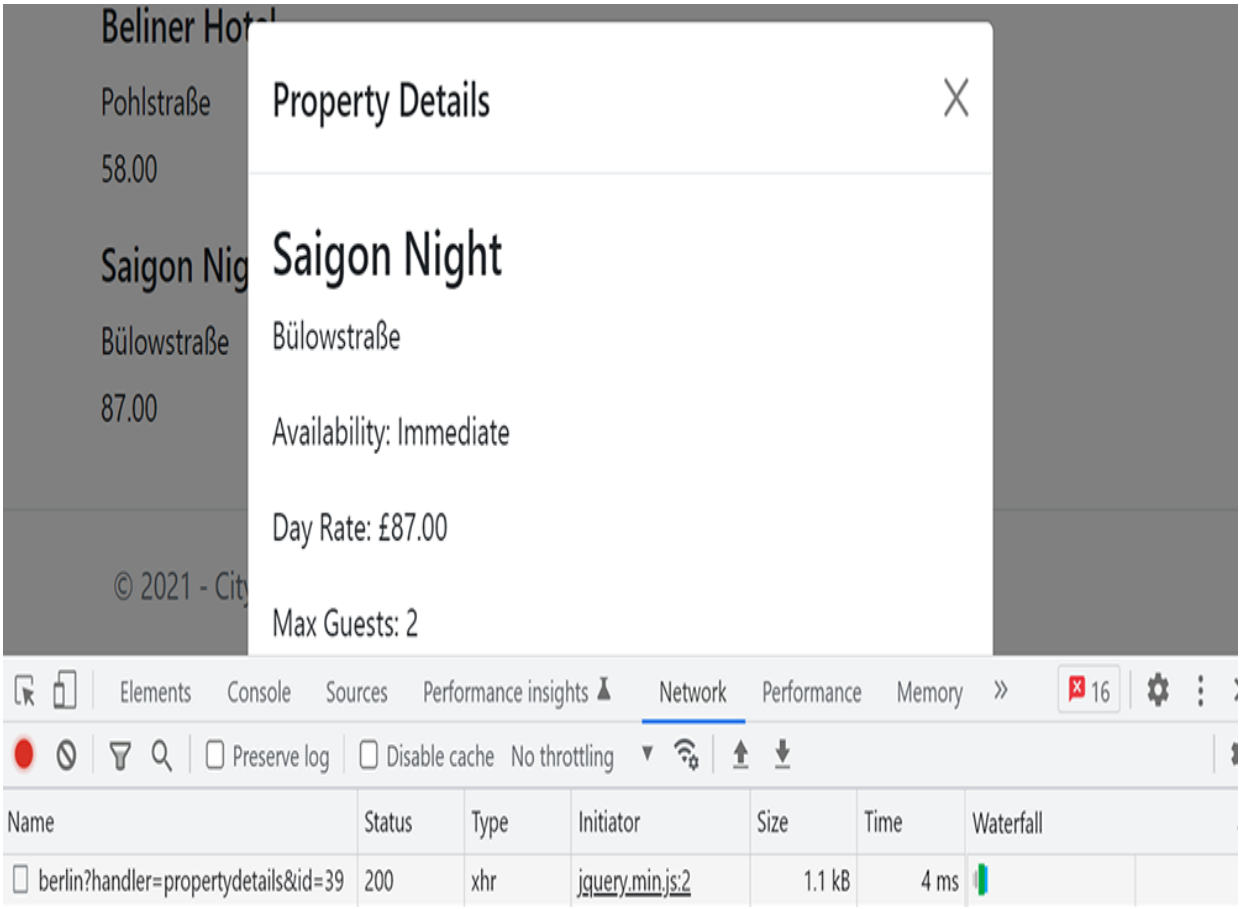


Figure 11.1 The request is recorded in the Network tab.

In this example, the request URL is `berlin?handler=properydetails&id=39`. The HTTP response status code is 200, and the type is specified as Fetch because my screengrab was taken using the Fetch example. If I had taken the grab using the jQuery code, the type would be recorded as `xhr`, representing the browser's XmlHttpRequest object that jQuery relies on for making AJAX calls. You may have different headings depending on your configuration, but you can right-click any of the headings to customize your view. If you click the name of the request in the Network tab, you can see more details of the actual request (figure 11.2), including the request and response headers and details of any data being passed in the request.