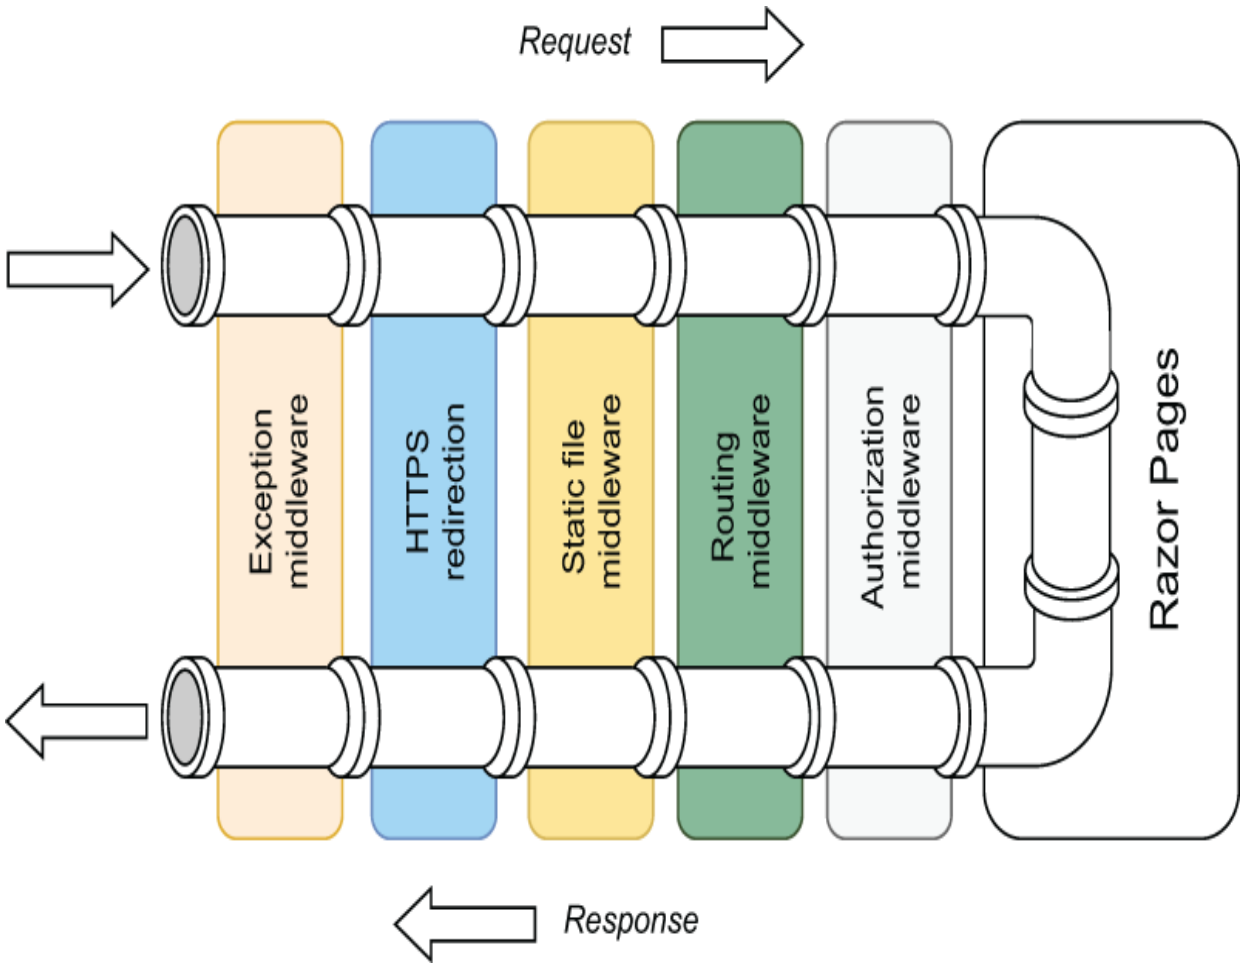


Figure 12.3 StatusCodePages operates on the return journey (the bottom part of the pipeline in the diagram) after the HTTP status code has been set.

The default behavior of StatusCodePages middleware is to return a plain text response when the status code is between 400 and 599 (but not for unhandled exceptions) and the response is empty. For example, having implemented `StatusCodePage` middleware, if you navigate to /city /mikebrind, the response is very plain, as shown in figure 12.4.