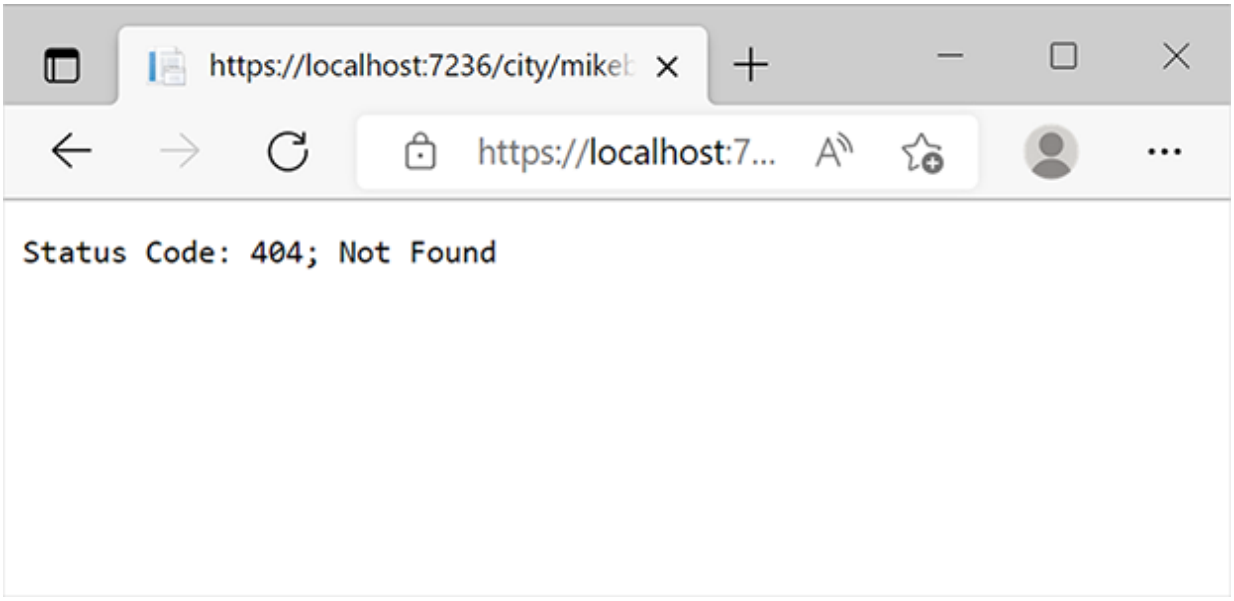


Figure 12.4 The default implementation of StatusCodePages middleware returns a plain text response.

A number of alternative methods exist, enabling you to register `StatusCodePages` middleware and take control over what is presented to the user. For example, you can pass in a string representing the content type and a body formatted accordingly:

```
app.UseStatusCodePages("text/html", "<h1>Error!</h1>");
```

Within a Razor Pages application, you will most likely want to return different content based on the status code, and you will also want to use Razor Pages to generate the HTML, rather than having one HTML message returned for all status codes. There are two methods for registering `StatusCodePages` middleware that enable this:

- `UseStatusCodePagesWithRedirects`
- `UseStatusCodePagesWithReExecute`