Name	Status
mikebrind	302
404	200
bootstrap.min.css	200

Figure 12.6 The initial request resulted in a 302 followed by a 200.

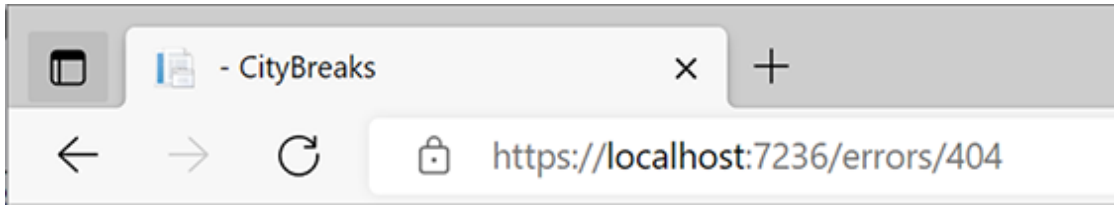


Figure 12.7 The browser address is changed to the custom error page.

There are a couple problems with this. Your error page suggests that the user checks the URL and tries again. However, the original request URL has been lost (unless they know how to use the developer tools). The second issue concerns search engines. Imagine if someone copies a link to the Paris city page, /city /paris, but omits the last character and pastes the result into something indexed by a search engine: /city/pari. The result of following that link is a 302 followed by a 200. The search engine will continue to index the resource, and users will be directed to the error page.

12.2.2 StatusCodePages WithReExecute

Ideally, you want the search engine to drop listings of any pages that cannot be found. If you are using Google webmaster tools, you can also get a report of requests that result in a 404, which enables you to act on them, such as setting up permanent redirects if they are the result of a typo in a URL, for example. So you need to allow the original 404 status code to reach the user agent. And this is what the second method for registering StatusCodePages