middleware supports. Rather than sending a redirect to the user agent, the StatusCodePages middleware intercepts the response with the 404 status code and reexecutes the request using the specified custom error page, while retaining the status code and original request URL (figure 12.8).

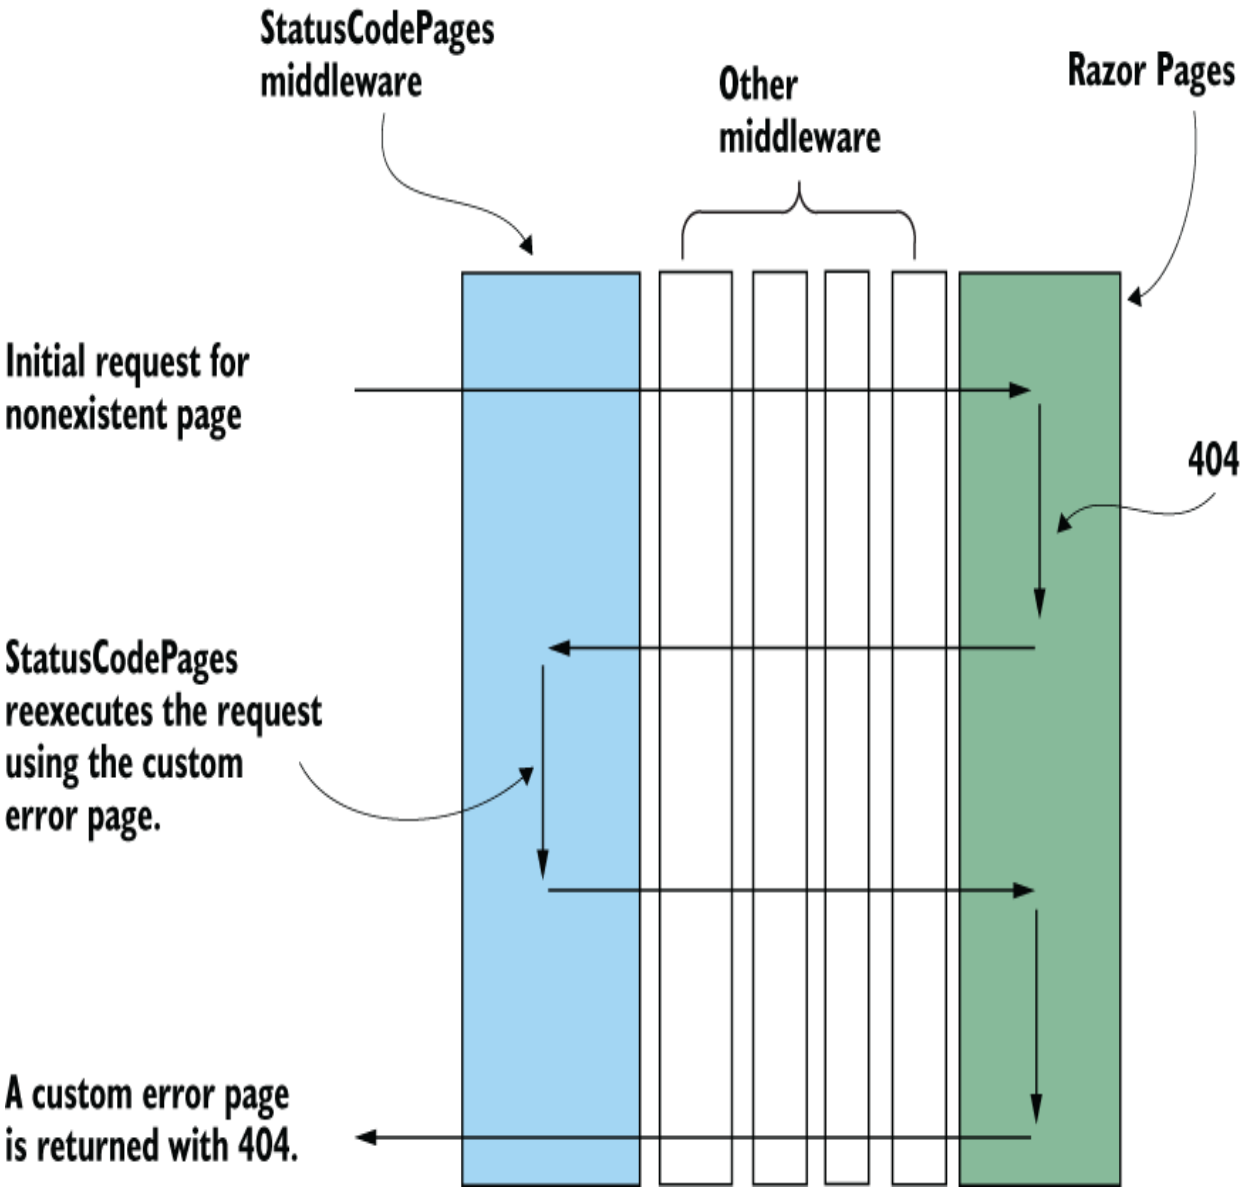



**Figure 12.8 `WithReExecute` results in the request being reexecuted within the application using the custom error page, while the status code and original request URL are retained.**