To register the reexecute option, use the `UseStatusCodePagesWithReExecute` method that takes a format string for the path and, optionally, another format string for a query string (shown in bold):

```
app.UseHttpsRedirection();
app.UseStatusCodePagesWithReExecute("/errors/{0}");
app.UseStaticFiles();
```

Run the application again, and navigate to /city /mikebrind. This time, you can see that the URL is preserved in the browser address bar, and the 404 status code is preserved (figure 12.9).

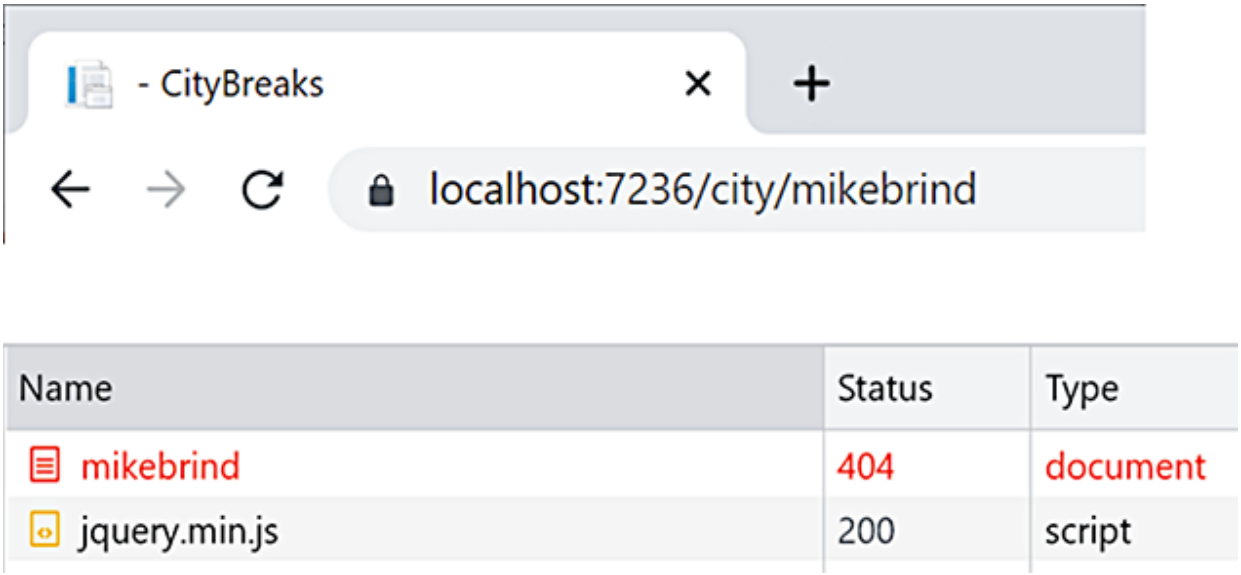


Figure 12.9 The URL is preserved in the browser along with the 404 status code when using the reexecute method.

You can clearly see the original request URL in the browser address bar in figure 12.9, but sometimes it's not possible to check the URL in a browser address bar. Browsers on smaller devices, such as cell phones, don't show the complete URL. To get around this, you might want to display the incorrect URL to the user as part of the error message you provide them, so