automatically for Visual Studio users. VS Code users need to use a slightly different command to enable hot reload. This feature works for changes to existing files. Since you are adding a new file, you need to stop your application first. Visual Studio users can simply close the browser to stop the application. If you launched your application using the CLI command, you should press Ctrl-C in the terminal window to shut the application down.

Visual Studio users should right-click on the Pages folder in Solution Explorer and choose Add > Razor Page from the available options (figure 2.6). Name the file Welcome .cshtml.

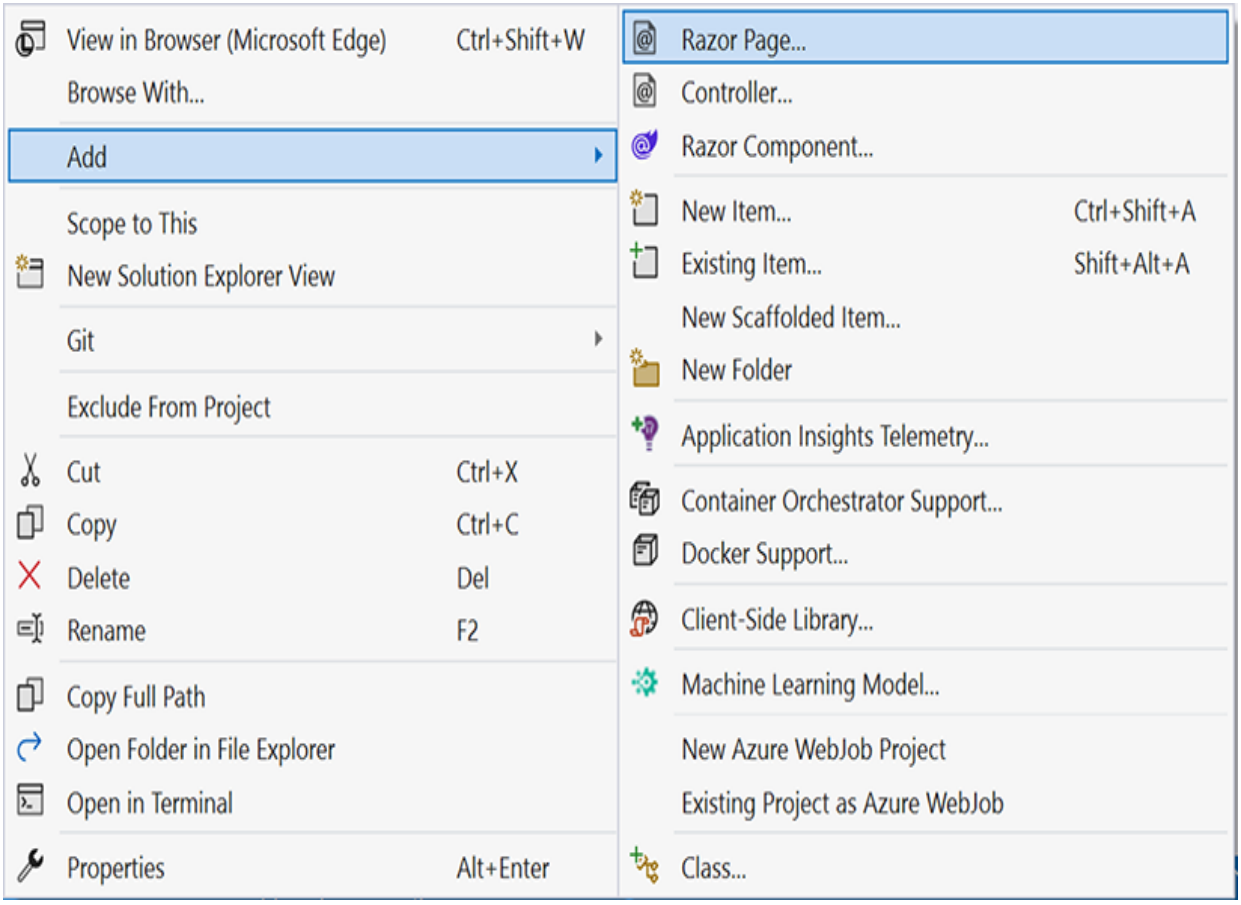


Figure 2.6 To add a new page in Visual Studio, right-click on the Pages folder, and choose Add, then Razor Page.