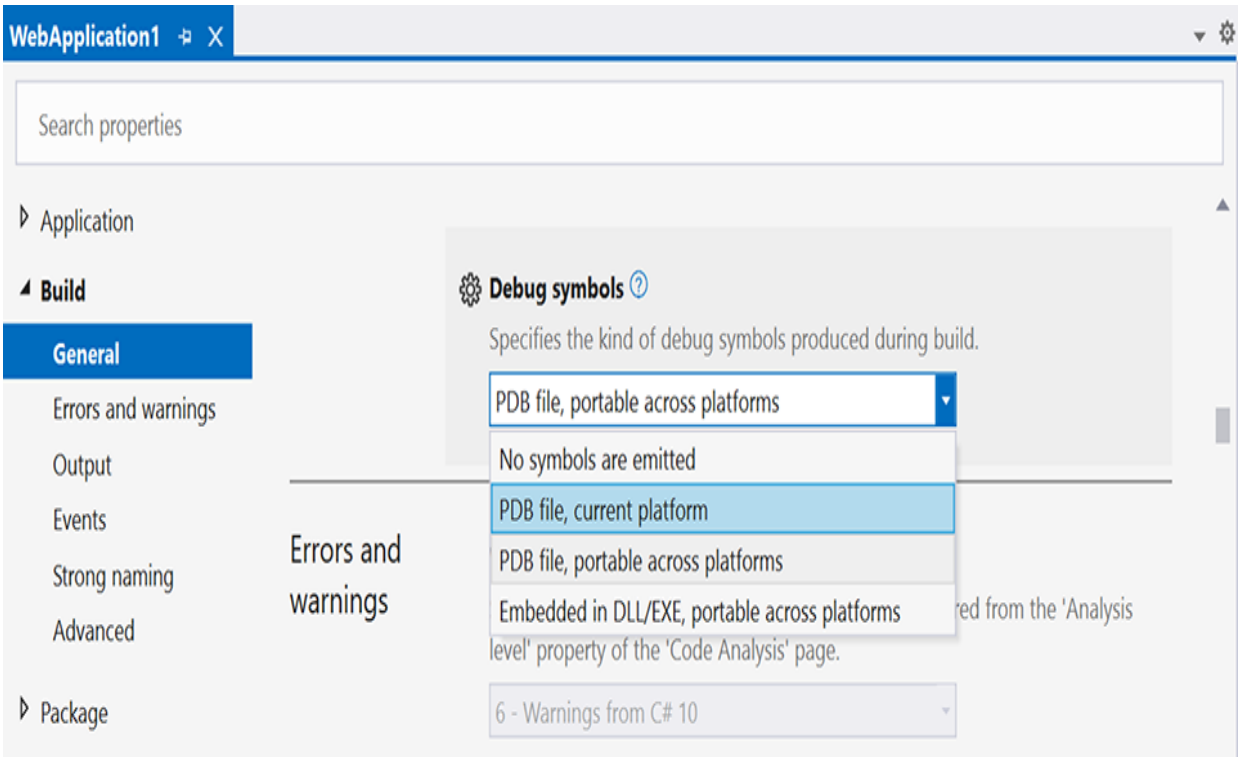


Figure 14.3 Suppress generation of the .pdb file when publishing.

Two .json files are generated. One contains information about runtime configuration (*.runtimeconfig.json), and the other contains data about all of the dependencies the application relies on (*.deps.json). This can grow quite large because it includes not only details of the NuGet packages you have included but also all of their dependencies.

The only thing that remains to be done is transferring the application to the target server. How you go about that task is dependent on what the target supports and is not covered in this book. You should check the documentation of your hosting provider, or if you are configuring the server yourself, you should refer to your provider’s support material. Before this book ends, however, there are a few common things to watch for when publishing and deploying your application.