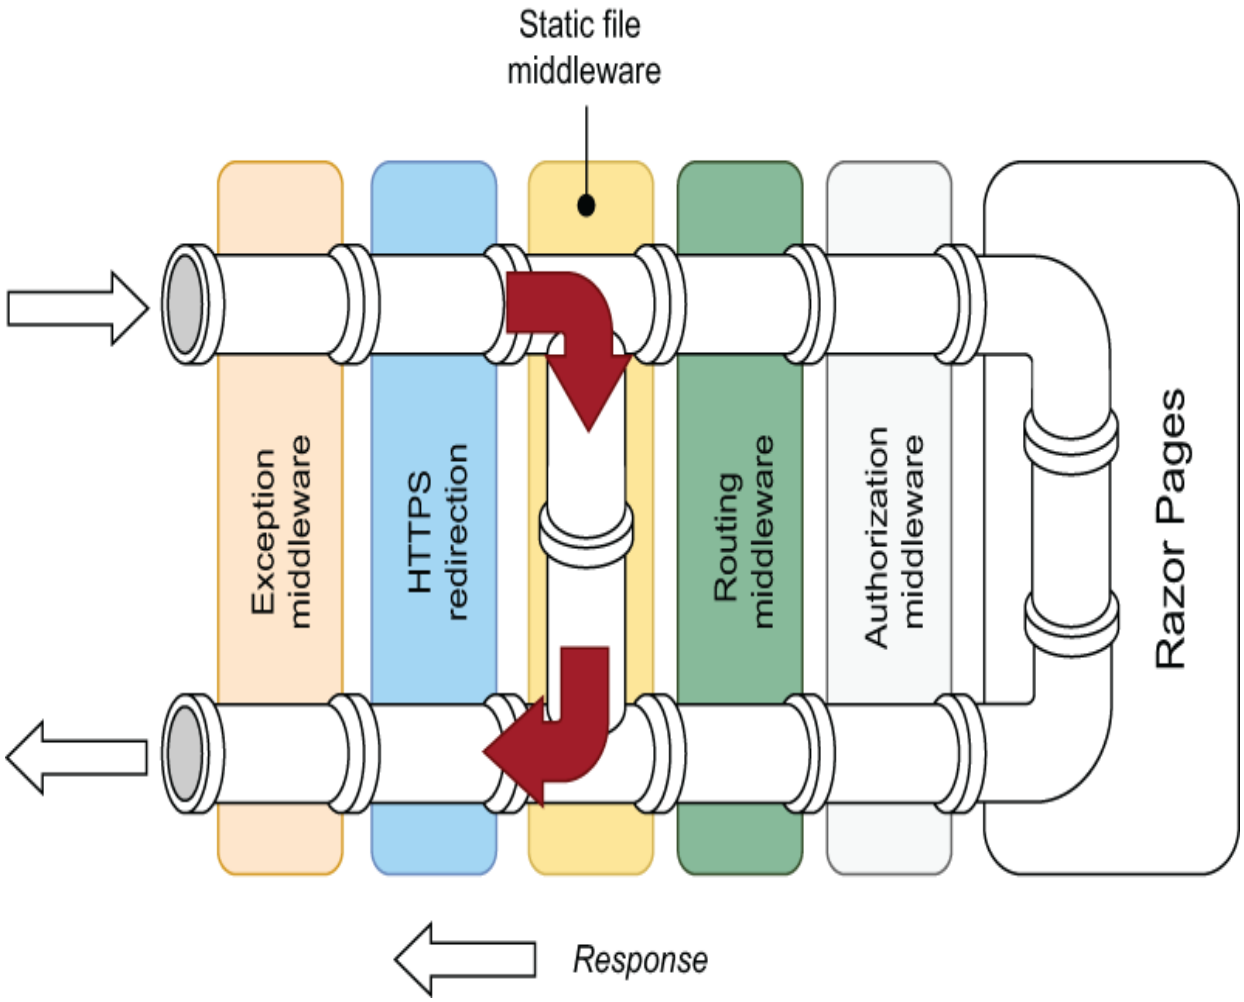


Figure 2.13 The middleware processes the request and returns the response when the request is for a known file.

The static file middleware inspects every request that reaches it to determine whether the request is for a *known file*—that is, one that resides in the wwwroot folder. If it is, the static file middleware simply returns the file, thereby short-circuiting the rest of the pipeline. Otherwise, the request is passed on to the next middleware in the pipeline.

2.3.4 Creating middleware