
dotnet restore fetches and restores any referenced NuGet packages.

dotnet build both restores and compiles by default.

dotnet run restores, builds, and then runs your app by default.

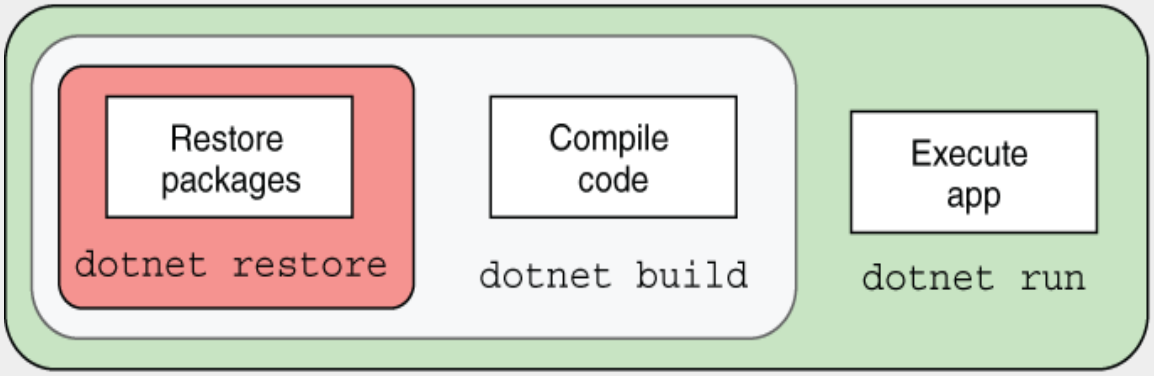

You can skip the previous steps with the –no-restore and –no-build flags.

The `dotnet build` command runs `dotnet restore` implicitly. Similarly, `dotnet run` runs `dotnet build` and `dotnet restore`. If you don't want to run the previous steps automatically, you can use the `--no-restore` and `--no-build flags`, as in `dotnet build --no-restore`.

You can compile your application by using `dotnet build`, which checks for any errors in your application and, if it finds no problems, produces output binaries that can be run with `dotnet run`.

Each command contains switches that can modify its behavior. To see the full list of available commands, run

```
dotnet --help
```

To see the options available for a particular command, such as `new`, run

```
dotnet new --help
```