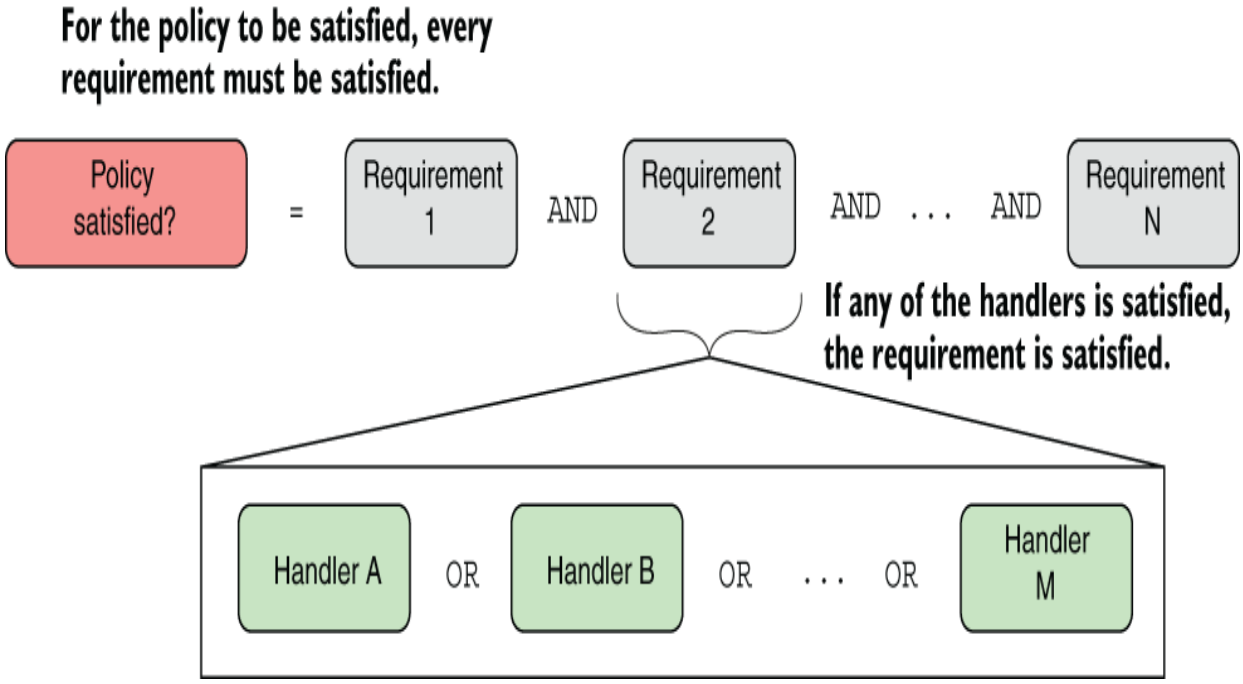


Figure 24.6 For a policy to be satisfied, every requirement must be satisfied. A requirement is satisfied if any of the handlers is satisfied.

TIP You can add multiple policies to a Razor Page or action method by applying the `[Authorize]` attribute multiple times, as in `[Authorize("Policy1"), Authorize("Policy2")]`. All policies must be satisfied for the request to be authorized.

I've highlighted requirements and handlers that will make up your `"CanAccessLounge"` policy, so in the next section you'll build each of the components and apply them to the airport sample app.

24.4.2 Creating a policy with a custom requirement and handler

You've seen all the pieces that make up a custom authorization policy, so in this section we'll explore the implementation of the