TIP If you get `401 Unauthorized` responses even after adding an `Authorization` header to your requests, double-check your spelling, and make sure that the token is added correctly with the `"Bearer "` prefix. Typos have a way of creeping in here! You can also increase the logging level in your API to see why failures are happening, as you'll learn in chapter 26.

Once you have added the token you can call your API, which should now return successfully, as shown in figure 25.10.

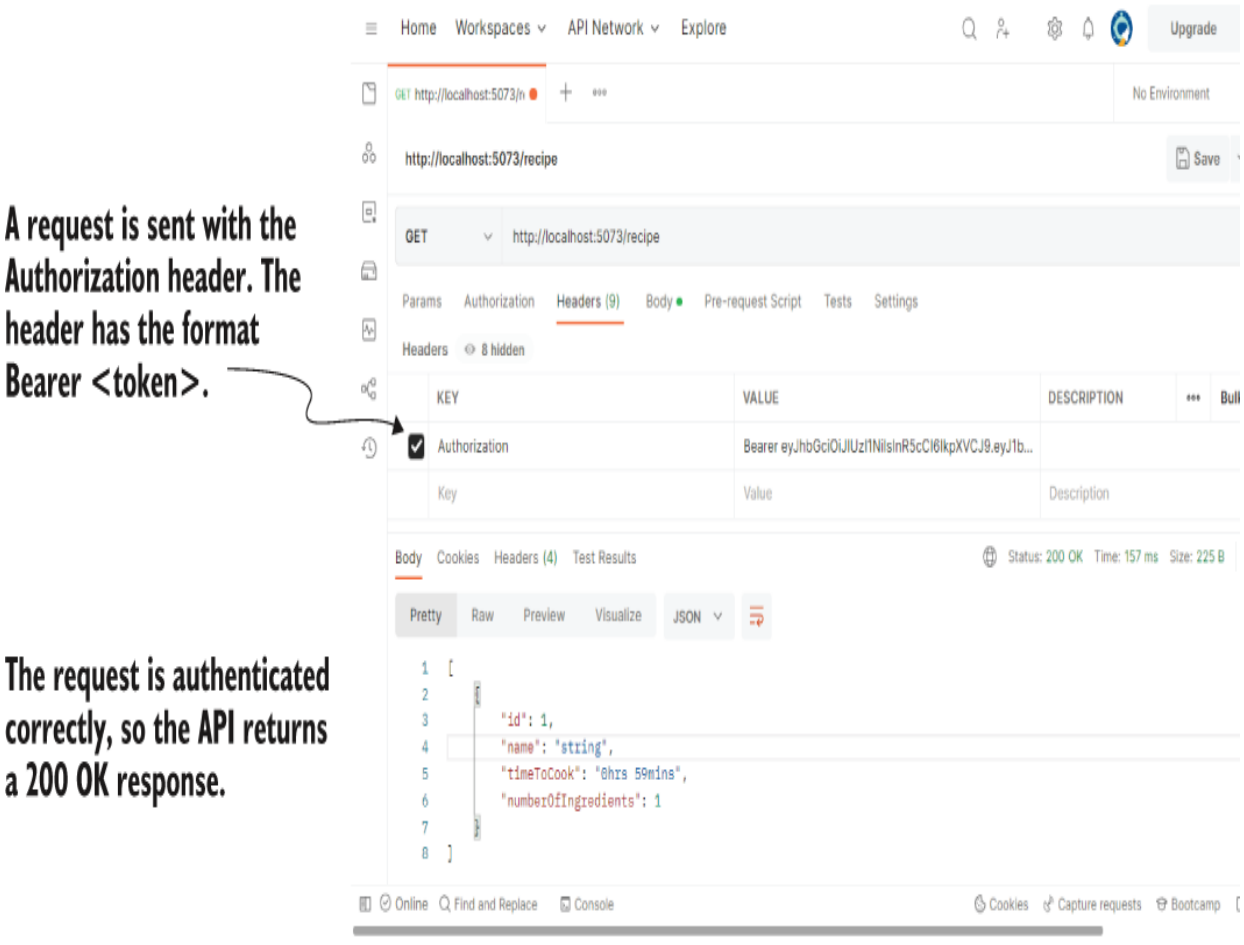


Figure 25.10 Sending a request with a bearer token for authorization using Postman. The `Authorization` header must have the format `Bearer`