



Choose the Authorize button to open the authorization dialog.

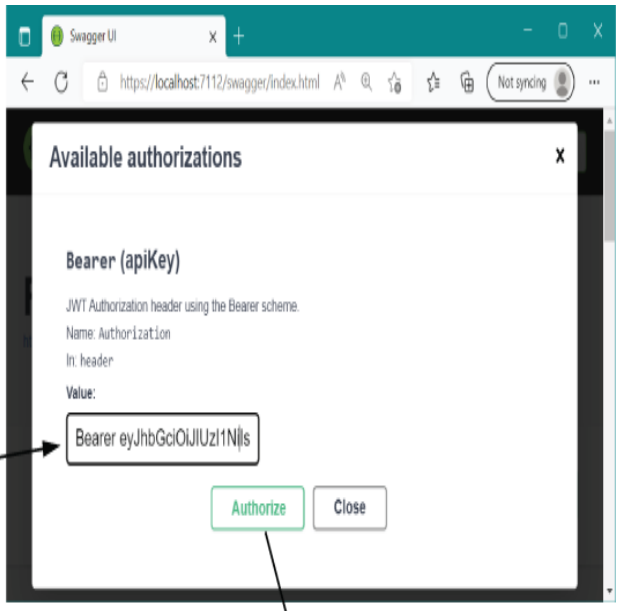

Enter the token in the text box, including the Bearer prefix, and choose Authorize.

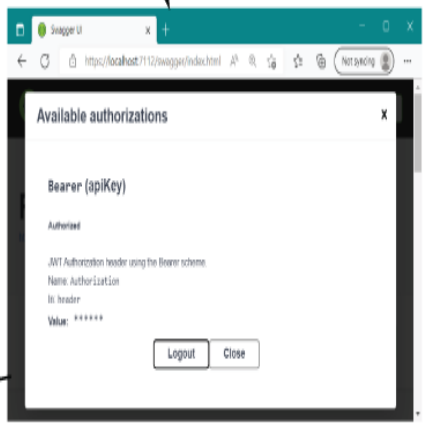

The Authorization header is sent for all subsequent requests, so they are authenticated successfully.

