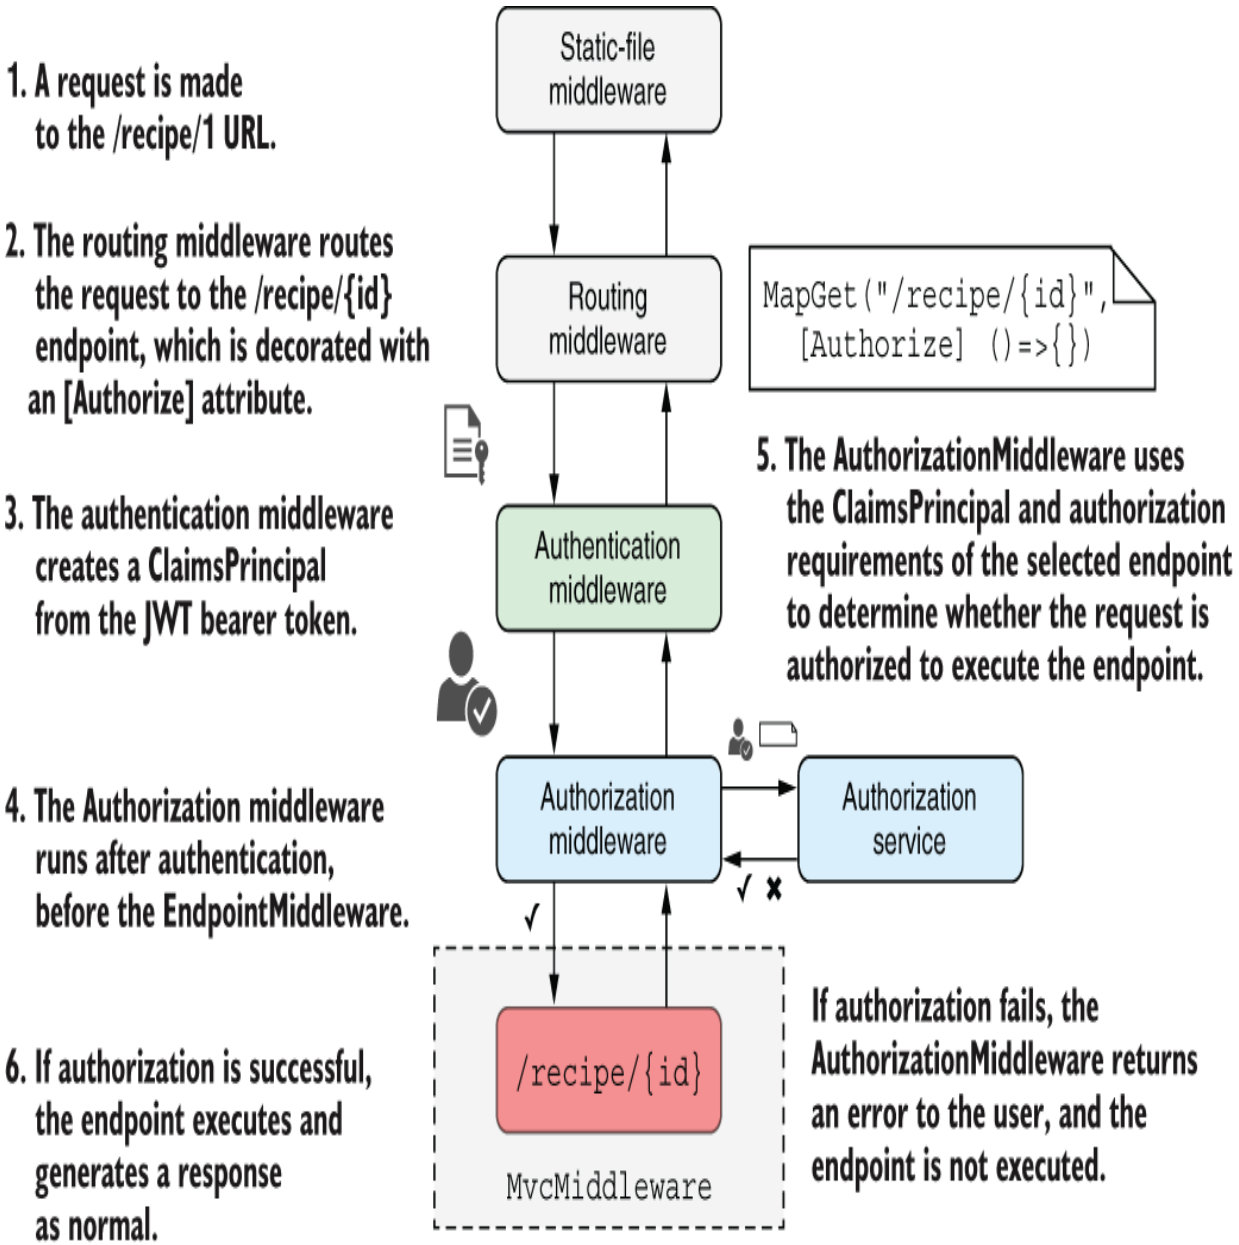


Figure 25.12 Authorizing a request to a minimal API endpoint. The routing middleware selects an endpoint that is protected by an authorization requirement. The authentication middleware decodes and verifies the bearer token, creating a `ClaimsPrincipal`, which the authorization middleware uses along with the endpoint metadata to determine whether the request is authorized.