are matched with parameters by position, so if you include two placeholders, for example, the second placeholder is matched with the second parameter.

TIP You could have used normal string interpolation to create the log message, as in `$"Loaded {Recipes.Count} recipes"`. But I recommend always using placeholders, as they provide additional information for the logger that can be used for structured logging, as you'll see in section 26.5.

When the `OnGet` page handler in the `IndexModel` executes, `ILogger` writes a message to any configured logging providers. The exact format of the log message varies from provider to provider, but figure 26.4 shows how the console provider displays the log message from listing 26.2.

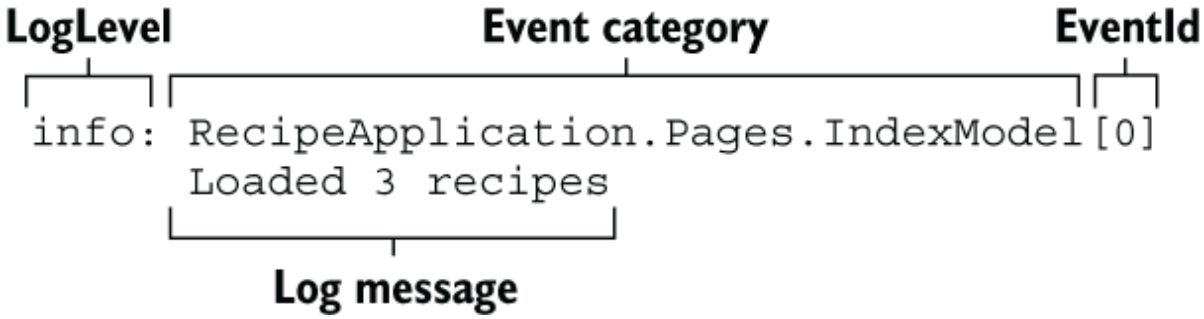


Figure 26.4 An example log message as it's written to the default console provider. The log-level category provides information about how important the message is and where it was generated. The `EventId` provides a way to identify similar log messages.

The exact presentation of the message will vary depending on where the log is written, but each log record includes up to six common elements:

- *Log level*—The log level of the log is how important it is and is defined by the `LogLevel` enum.