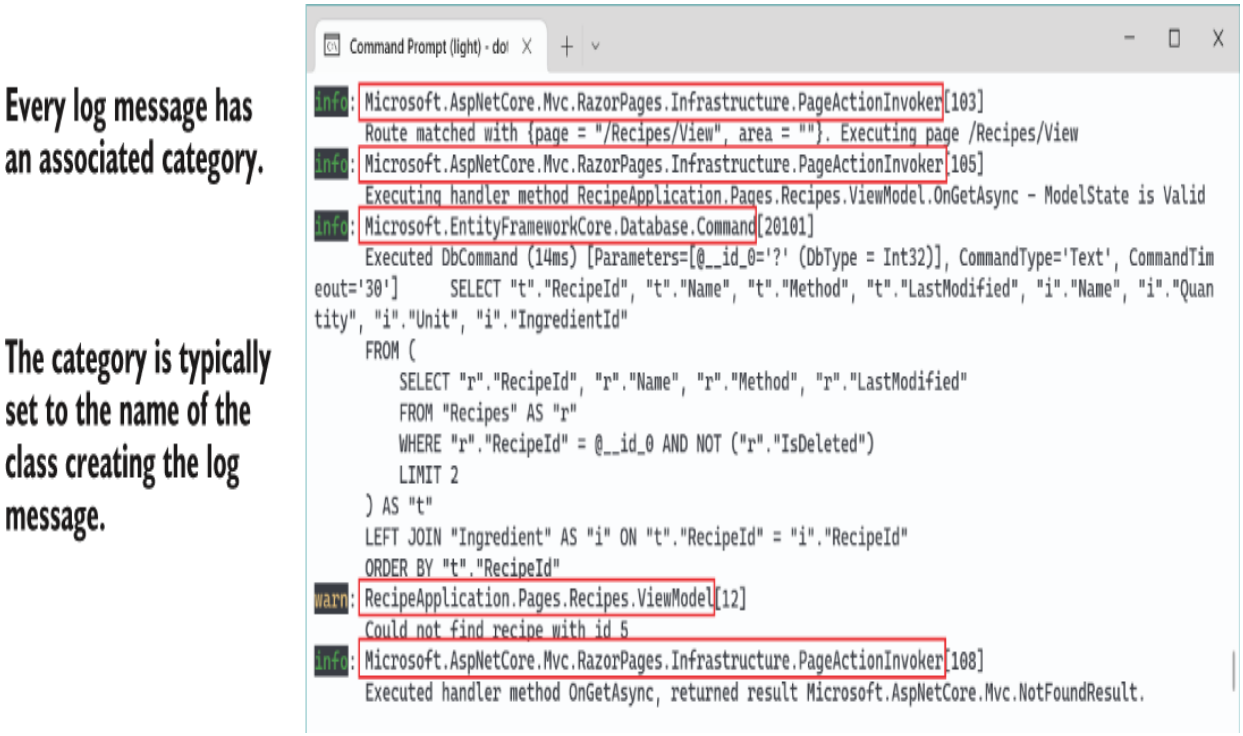


Figure 26.6 Every log message has an associated category, which is typically the class name of the component creating the log. The default console logging provider outputs the log category for every log.

The category is a `string`, so you can set it to anything, but the convention is to set it to the fully qualified name of the type that's using `ILogger`. In section 26.2 I achieved this by injecting `ILogger<T>` into `RecipeController`; the generic parameter `T` is used to set the category of the `ILogger`.

Alternatively, you can inject `ILoggerFactory` into your methods and pass an explicit category when creating an `ILogger` instance, as shown in the following listing. This lets you change the category to an arbitrary string.

Listing 26.4 Injecting `ILoggerFactory` to use a custom category