your app needs to run. The following command packages the app from the current directory and builds it to a subfolder called publish. I've used the `Release` configuration instead of the default `Debug` configuration so that the output will be fully optimized for running in production:

```
dotnet publish --output publish --configuration Release
```

TIP Always use the `Release` configuration when publishing your app for deployment. This ensures that the compiler generates optimized code for your app.

Once the command completes, you'll find your published application in the publish folder, as shown in figure 27.3.

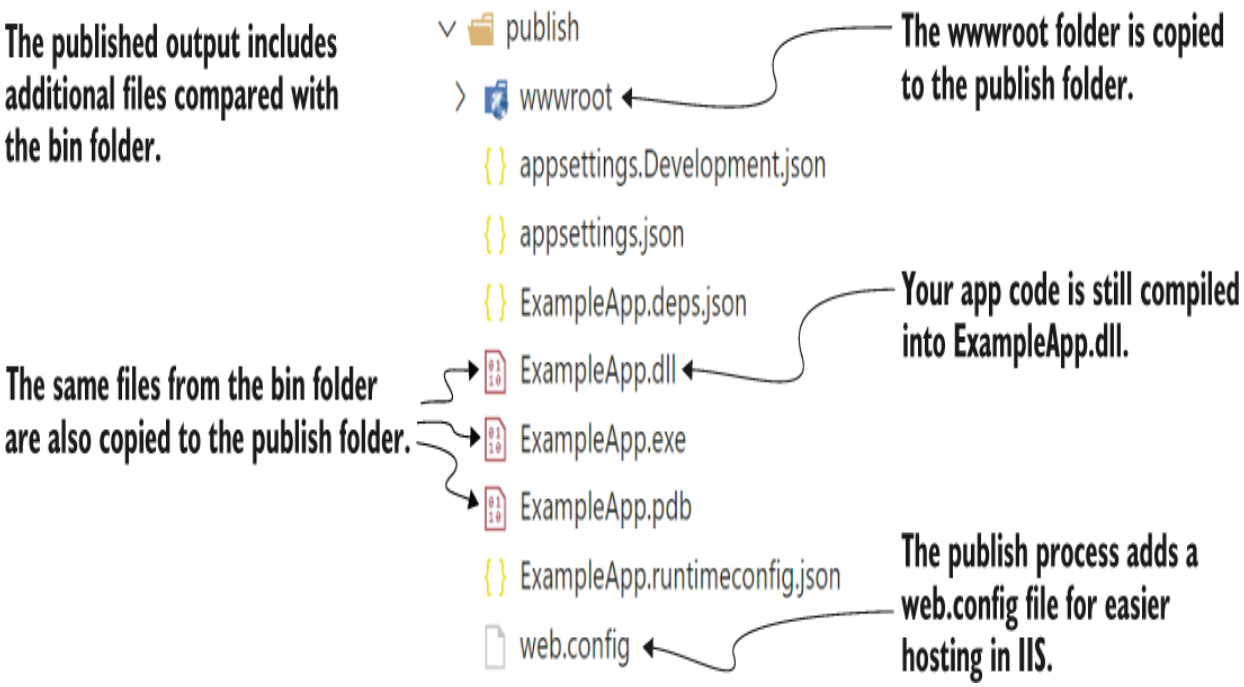


Figure 27.3 The publish folder for the app after running `dotnet publish`. The app is still compiled into a single .dll file, but all the additional files, such as wwwroot, are also copied to the output.