contrast with the monolithic IIS, Linux has a philosophy of small applications, each with a single responsibility.

IIS runs on the same server as your app and takes on multiple duties—proxying traffic from the internet to your app, but also monitoring the app process itself. If your app crashes or stops responding, IIS restarts the process to ensure that you can keep handling requests.

In Linux, the reverse proxy might be running on the same server as your app, but it's also common for it to be running on a different server, as shown in figure 27.9. This is similarly true if you choose to deploy your app to Docker; your app would typically be deployed in a container without a reverse proxy, and a reverse proxy on a server would point to your Docker container.

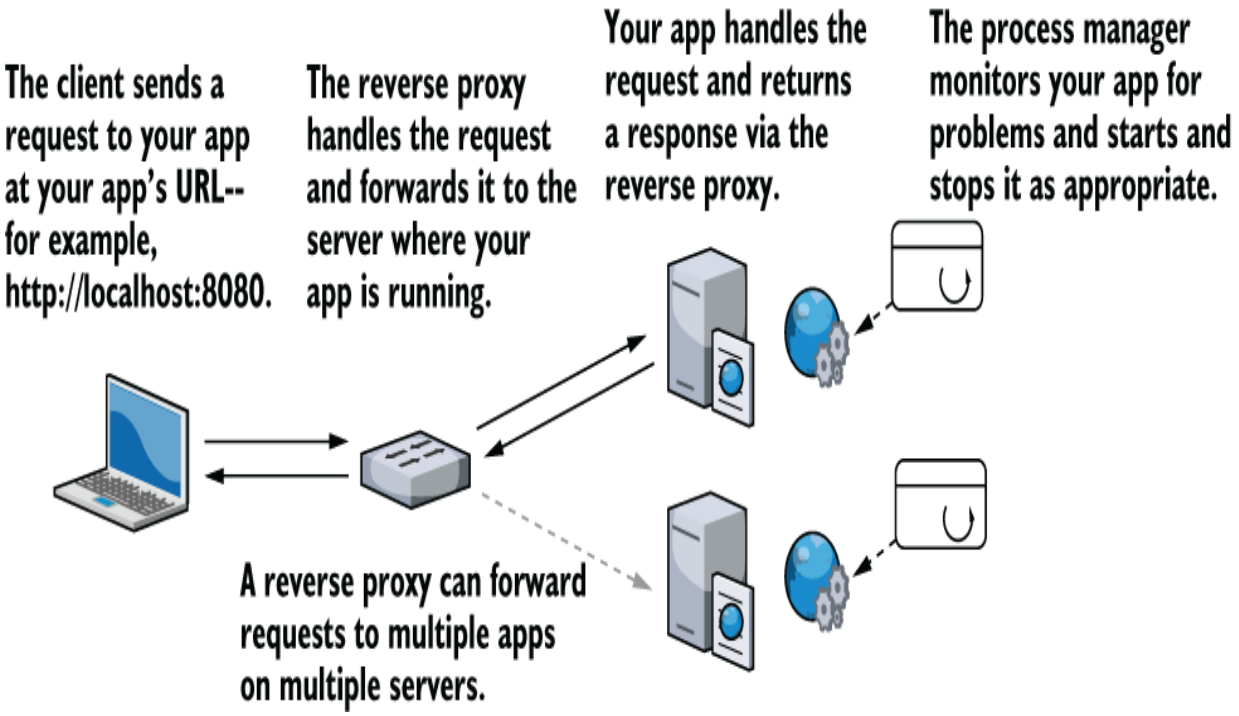


Figure 27.9 In Linux, it's common for a reverse proxy to be on a different server from your app. The reverse proxy forwards incoming