Running a published application using `dotnet <app.dll>` within the same command window, as shown in figure 27.10, shows that the app is now listening on the URL provided in the `ASPNETCORE_URLS` variable.

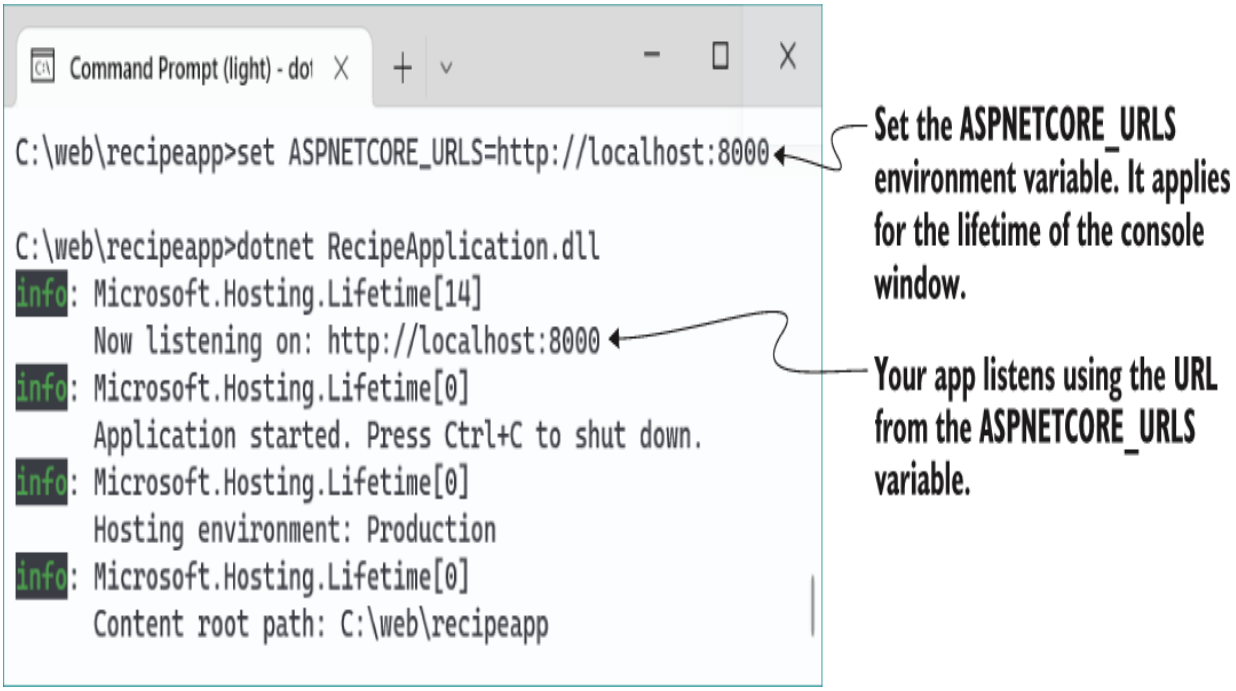


Figure 27.10 Change the `ASPNETCORE_URLS` environment variable to change the URL used by ASP.NET Core apps.

You can instruct an app to listen on multiple URLs by separating them with a semicolon, or you can listen to a specific port without specifying the localhost hostname. If you set the `ASPNETCORE_URLS` environment variable to

```
http://localhost:5001;http://*:5002
```

your ASP.NET Core apps will listen for requests sent to the following: