In chapter 10 you saw that you could set the hosting environment using the `ASPNETCORE_ENVIRONMENT` variable, but you could also set the environment using the `--environment` flag when calling `dotnet run`:

```
dotnet run --no-launch-profile --environment Staging
```

You can set the URLs for your application in a similar way, using the `--urls` parameter. Using command-line arguments enables you to have multiple ASP.NET Core applications running on the same machine, listening to different ports. For example, the following command would run the recipe application, set it to listen on port 8081, and set the environment to staging (figure 27.11):

```
dotnet RecipeApplication.dll --urls "http://*:8081" --environment Staging
```

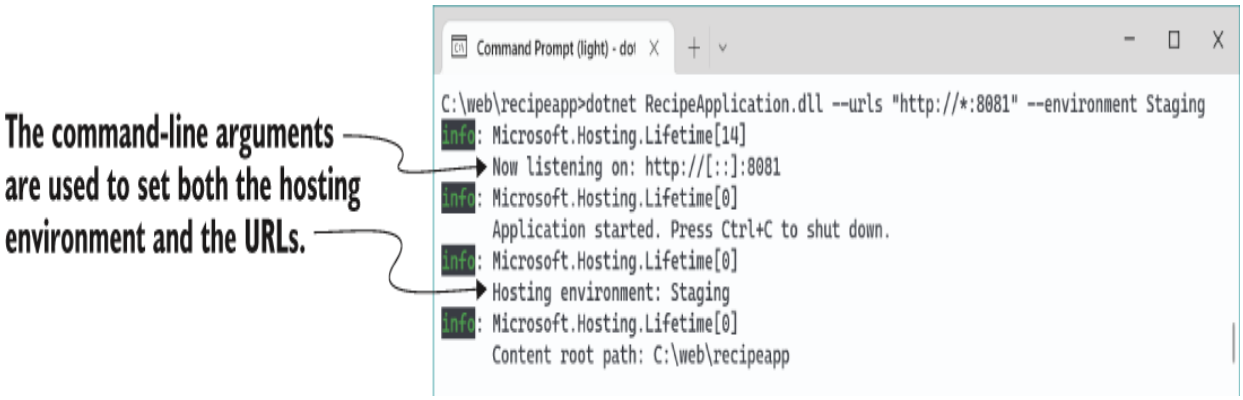


Figure 27.11 Setting the hosting environment and URLs for an application using command-line arguments. The values passed at the command line override values provided from appSettings.json or environment variables.