Figure 28.4 The developer certificate is not trusted by default, so apps serving HTTPS traffic using it will be marked as insecure by browsers. Although you can bypass the warnings if necessary, you should instead update the certificate to be trusted.

To solve these browser warnings, you need to *trust* the certificate. Trusting a certificate is a sensitive operation; it's saying "I know this certificate doesn't look quite right, but ignore that," so it's hard to do automatically. If you're running on Windows or macOS, you can trust the development certificate by running

```
dotnet dev-certs https --trust
```

This command trusts the certificate by registering it in the operating system's certificate store. After you run this command, you should be able to access your websites without seeing any warnings or "not secure" labels, as shown in figure 28.5.

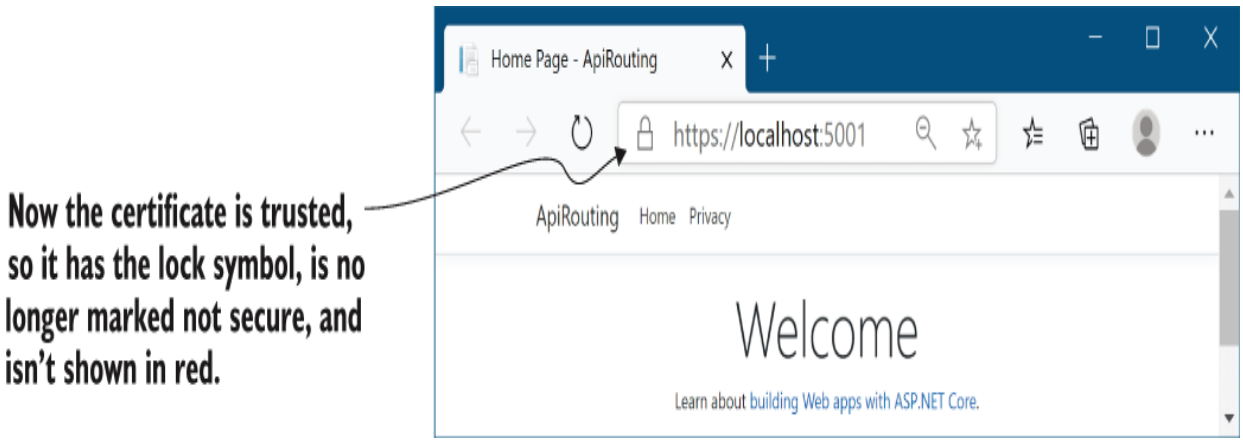


Figure 28.5 Once the development certificate is trusted, you will no longer see browser warnings about the connection.