bar of the app, the browser automatically replaces the request with an https:// version.

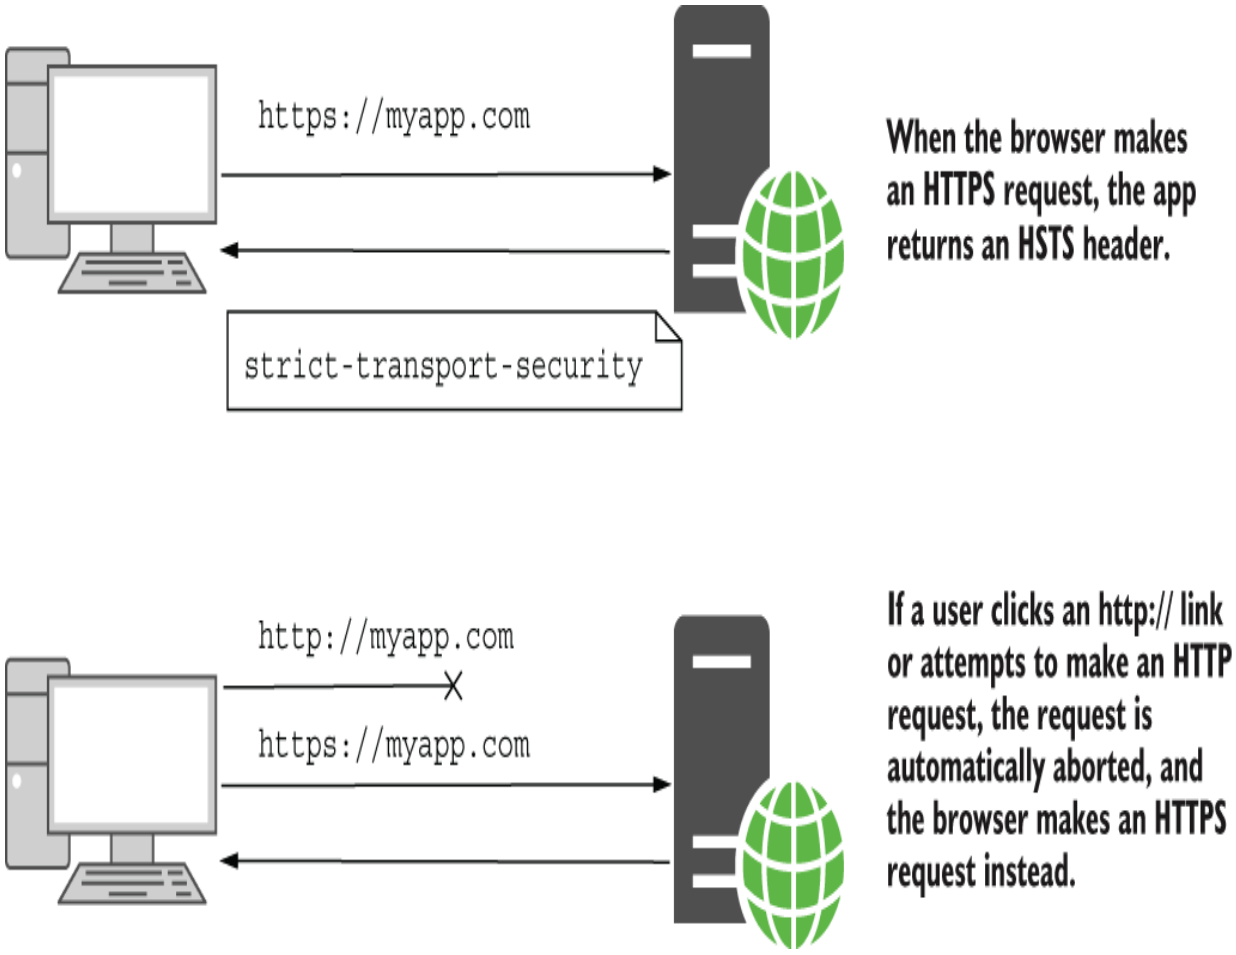


Figure 28.7 After a browser sends an HTTPS request, the app returns an HSTS header, instructing the browser to always send requests over HTTPS. The next time the user attempts to make an http:// request, the browser aborts the request and makes an https:// request instead.

TIP You can achieve a similar upgrading of HTTP to HTTPS requests using the `Upgrade-Insecure-Requests` directive in the `Content-Security-Policy` (CSP) header. This provides fewer protections