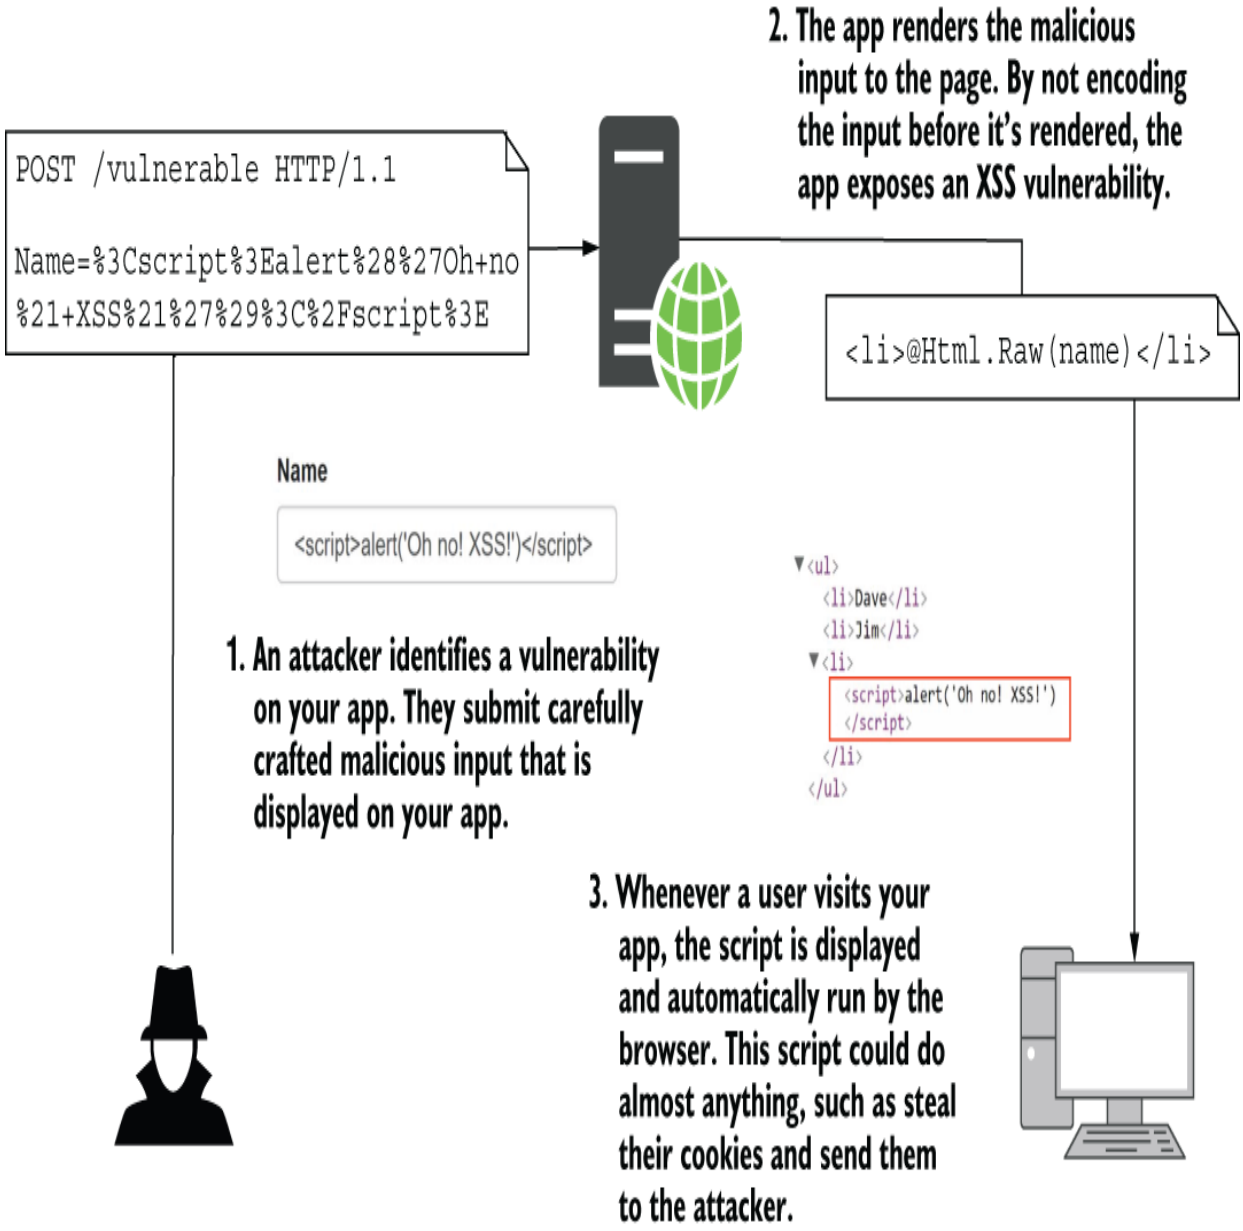


Figure 29.1 How an XSS vulnerability is exploited. An attacker submits malicious content to your app, which is displayed in the browsers of other users. If the app doesn't encode the content when writing to the page, the input becomes part of the HTML of the page and can run arbitrary JavaScript.

In figure 29.1 the user entered a snippet of HTML, such as their name. When users view the list of names, the Razor template renders the names using