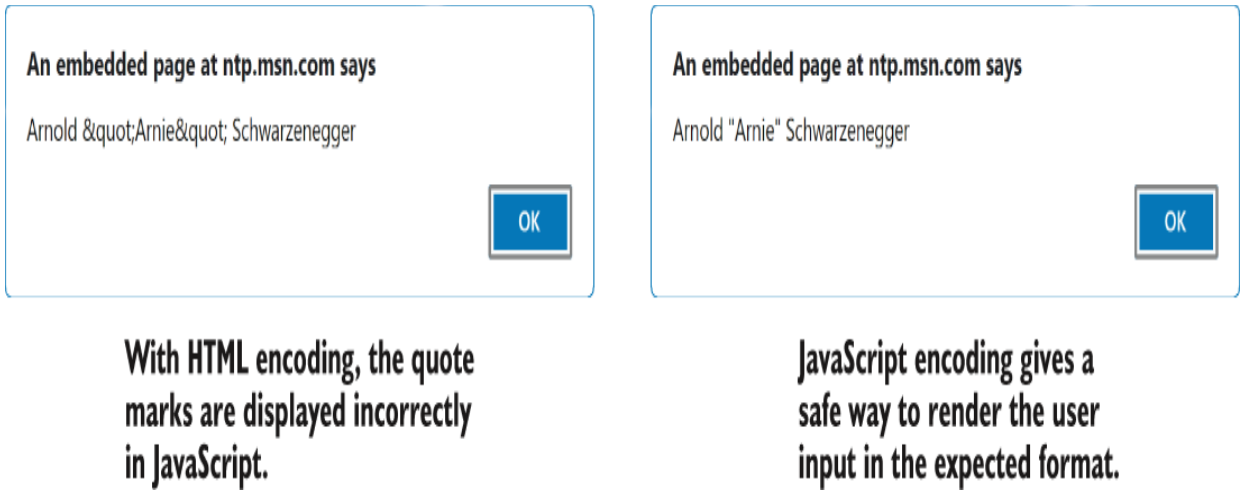


Figure 29.3 Comparison of alerts when using JavaScript encoding compared with HTML encoding

Instead, you should encode the variable using JavaScript encoding so that the double-quote character is rendered as a safe Unicode character, `\u0022`. You can achieve this by injecting a `JavaScriptEncoder` into the view and calling `Encode()` on the `name` variable:

```
@inject System.Text.Encodings.Web.JavaScriptEncoder encoder;
<script>var name = '@encoder.Encode(name)'</script>
```

To avoid having to remember to use JavaScript encoding, I recommend that you don't write values into JavaScript like this. Instead, write the value to an HTML element's attributes, and then read that into the JavaScript variable later, as shown in the following listing. That prevents the need for the JavaScript encoder entirely.

Listing 29.1 Passing values to JavaScript by writing them to HTML attributes

```
<div id="data" data-name="@name"></div>
<script>                                          ❶
var ele = document.getElementById('data');        ❷
```