`returnUrl` is set to the website they want to send the user to and convinces the user to click the link to your web app. After the user logs in, a vulnerable app redirects the user to the malicious site.

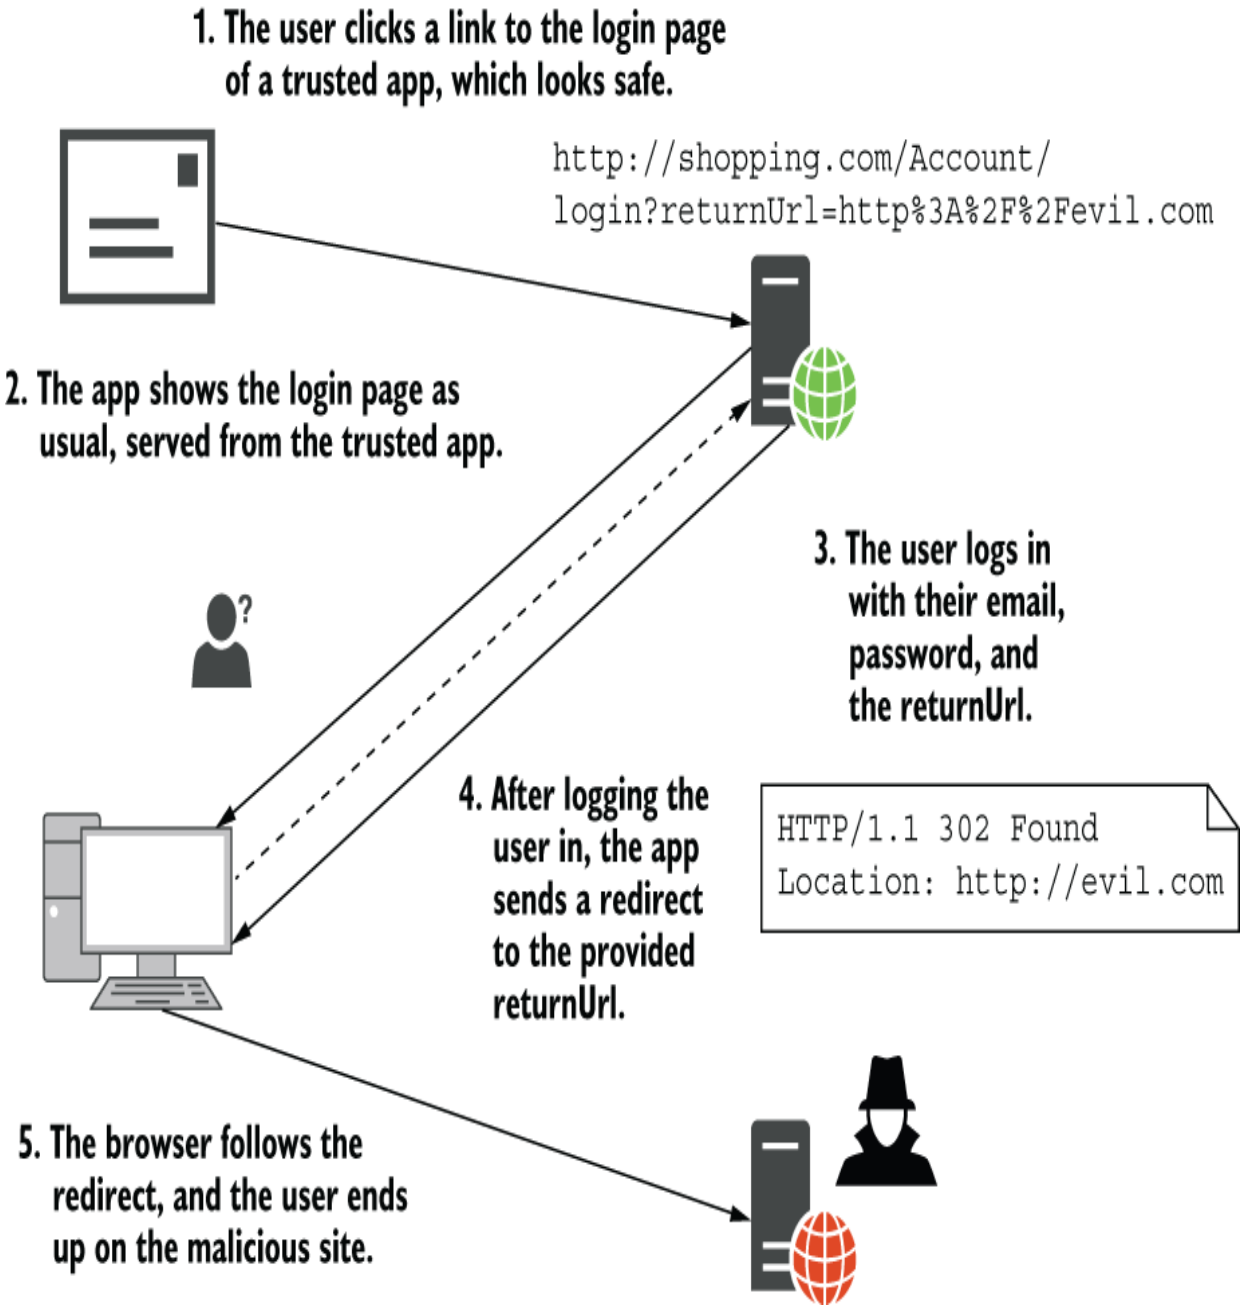


Figure 29.9 An open redirect makes use of the common return URL pattern. This is typically used for login pages but may be used in other