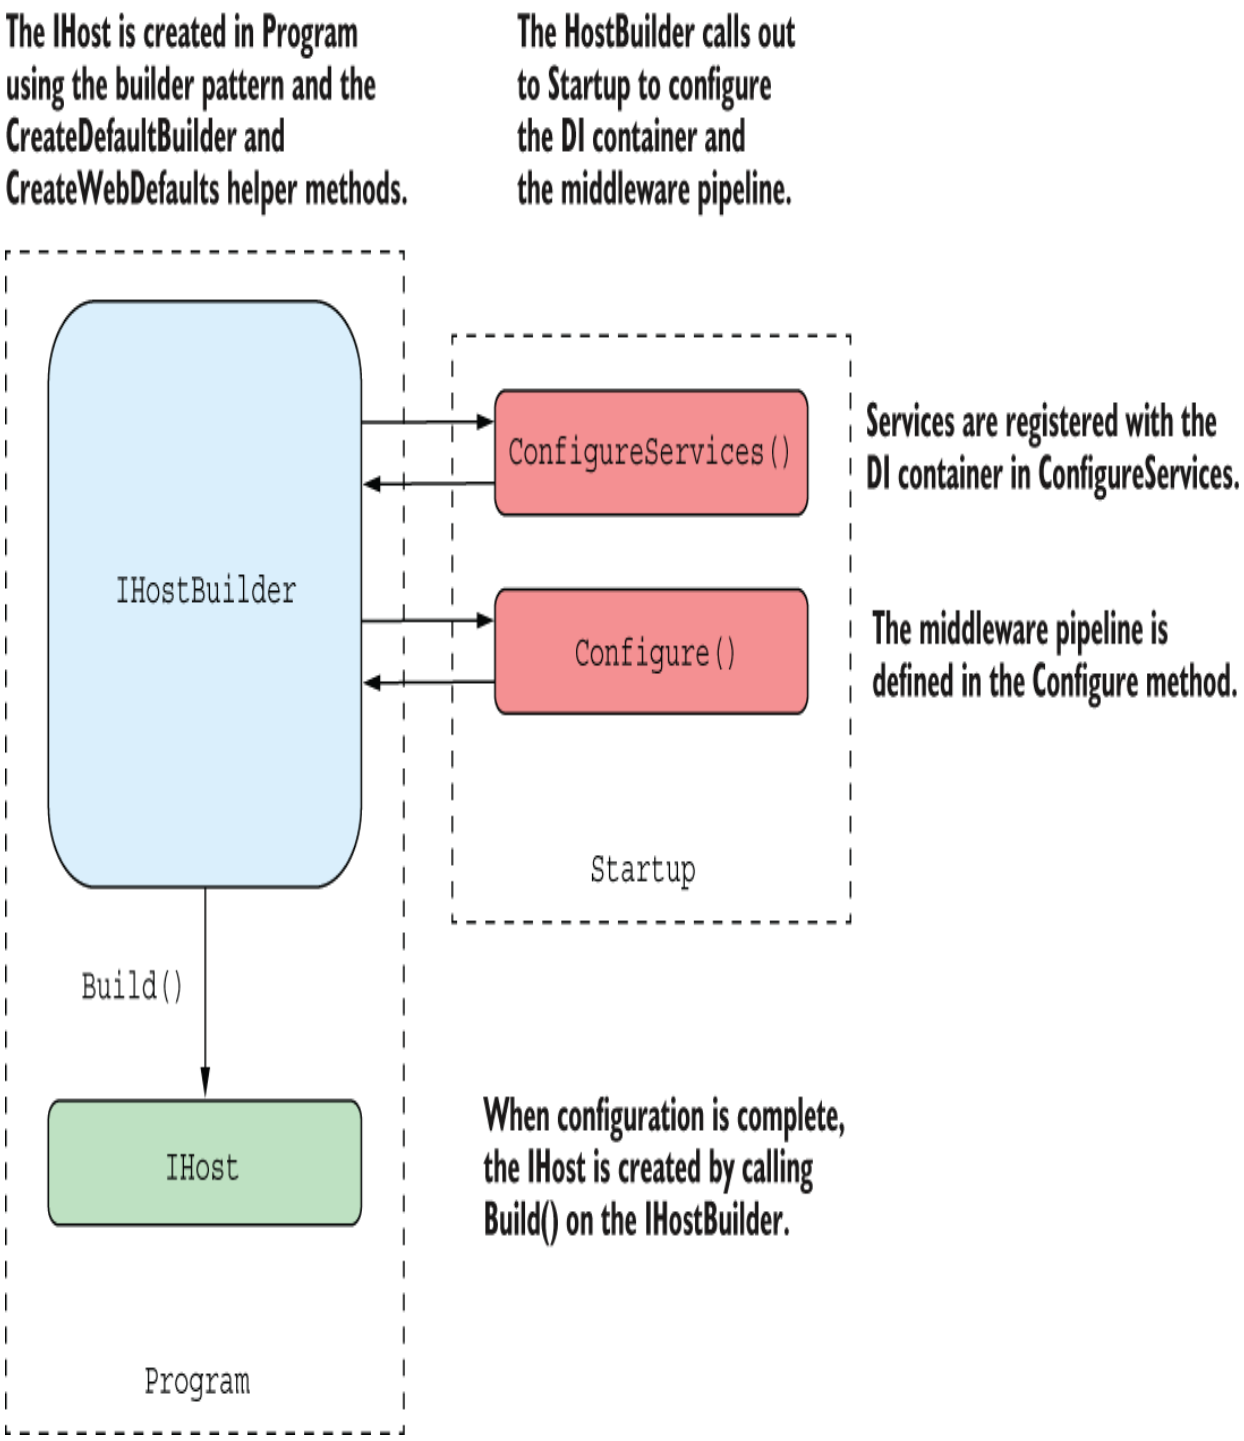


Figure 30.2 The `IHostBuilder` is created in Program.cs and calls methods on `Startup` to configure the application's services and middleware pipeline. Once configuration is complete, the `IHost` is created by calling `Build()` on the `IHostBuilder`.