Each call to `Configure<T>()`, both the binding to `IConfiguration` and the lambda function, adds another configuration step to the `CurrencyOptions` object. When the DI container first requires an instance of `IOptions<CurrencyOptions>`, the steps run in turn, as shown in figure 31.5.

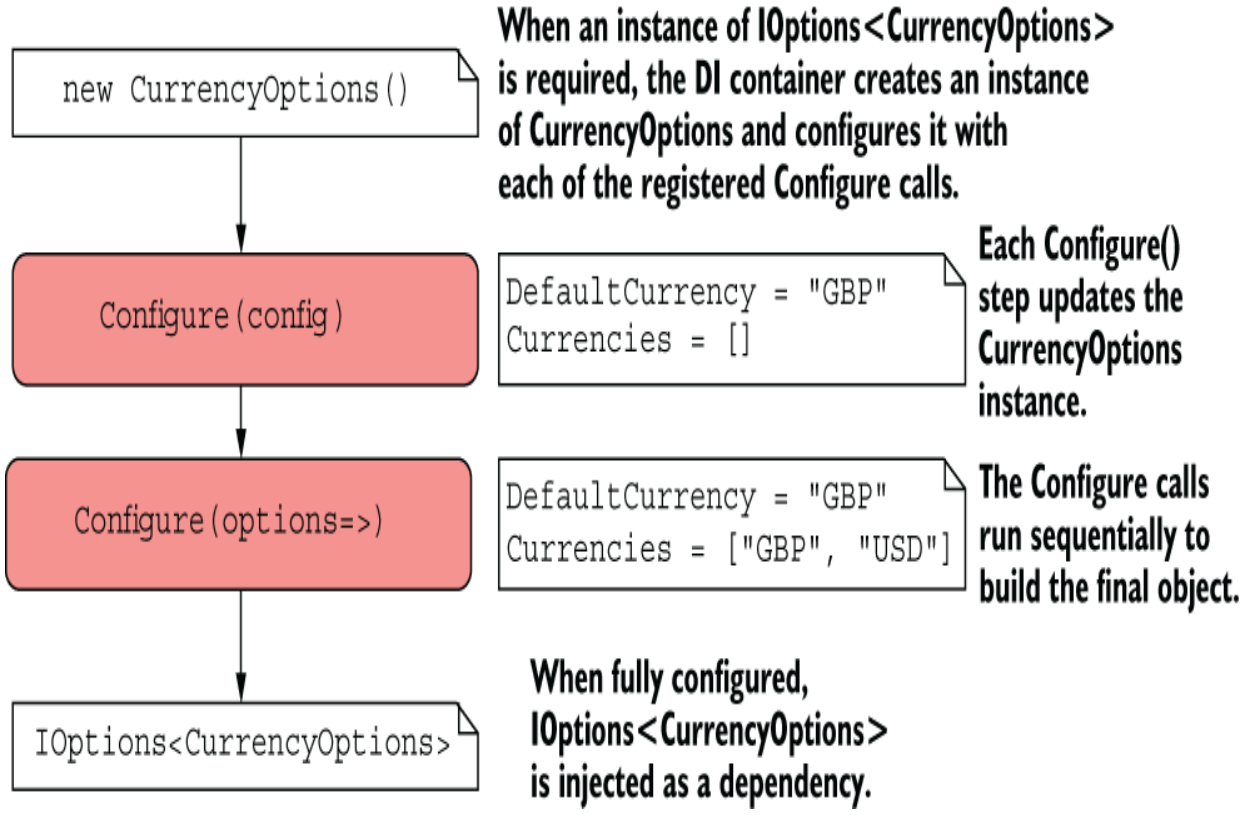


Figure 31.5 Configuring a `CurrencyOptions` object. When the DI container needs an `IOptions<>` instance of a strongly typed object, the container creates the object and then uses each of the registered `Configure()` methods to set the object's properties.

In the previous code snippet, you set the `Currencies` property to a static array of strings in a lambda function. But what if you don't know the correct values ahead of time? You might need to load the available currencies from a