HTML-encode data you write to the page to avoid cross-site scripting (XSS) vulnerabilities and to ensure that the data is displayed correctly.

You've defined two properties on your Tag Helper, `IncludeMachine` and `IncludeOS`, which you'll use to control which data is written to the page. These are decorated with a corresponding `[HtmlAttributeName]`, which enables setting the properties from the Razor template. In Visual Studio you'll even get IntelliSense and type-checking for these values, as shown in figure 32.2.

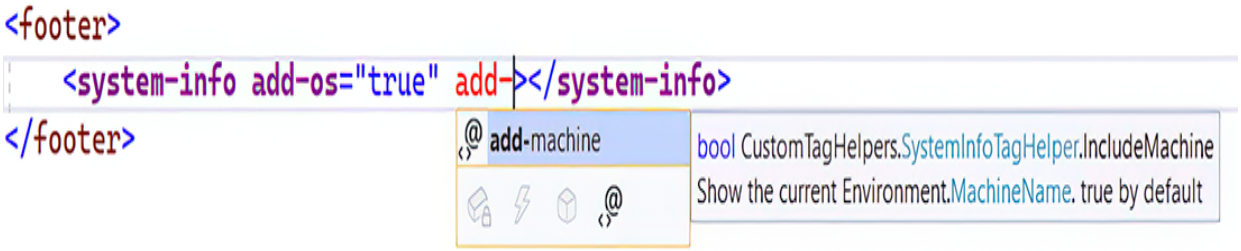


Figure 32.2 In Visual Studio, Tag Helpers are shown in a purple font, and you get IntelliSense for properties decorated with `[HtmlAttributeName]`.

Finally, we come to the `Process()` method. The Razor engine calls this method to execute the Tag Helper when it identifies the target element in a view template. The `Process()` method defines the type of tag to render (`<div>`), whether it should render a start and end tag (or a self-closing tag—it depends on the type of tag you're rendering), and the HTML content of the `<div>`. You set the HTML content to be rendered inside the tag by calling `Content.SetHtmlContent()` on the provided instance of `TagHelperOutput`.