so you can't return status codes or redirects. You'll typically use the `View()` helper method to render a partial view template (as in the previous listing), though you can also return a string directly using the `Content()` helper method, which will HTML-encode the content and render it to the page directly.

You can pass any number of parameters to the `InvokeAsync` method. The name of the parameters (in this case, `numberOfRecipes`) is converted to kebab-case and exposed as a property in the view component's Tag Helper (`<number-of-recipes>`). You can provide these parameters when you invoke the view component from a view, and you'll get IntelliSense support, as shown in figure 32.5.

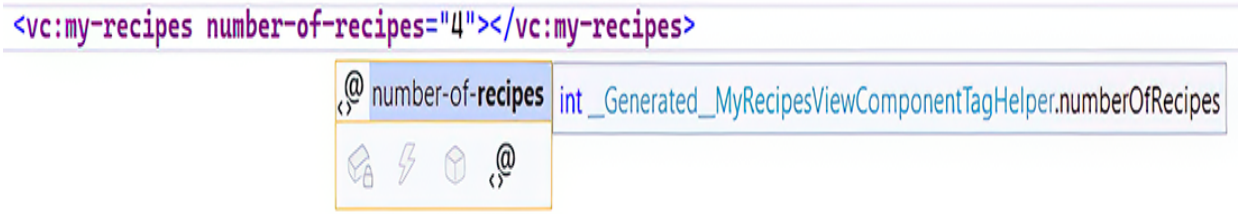


Figure 32.5 Visual Studio provides IntelliSense support for the method parameters of a view component's `InvokeAsync` method. The parameter name, in this case `numberOfRecipes`, is converted to kebab-case for use as an attribute in the Tag Helper.

View components have access to the current request and `HttpContext`. In listing 32.5 you can see that we're checking whether the current request was from an authenticated user. You can also see that we've used some conditional logic. If the user isn't authenticated, we render the "Unauthenticated" Razor template; if they're authenticated, we render the default Razor template and pass in the view models loaded from the database.