example where a minimal API endpoint calls an external API to fetch the latest currency exchange rates, and returns them as the response.

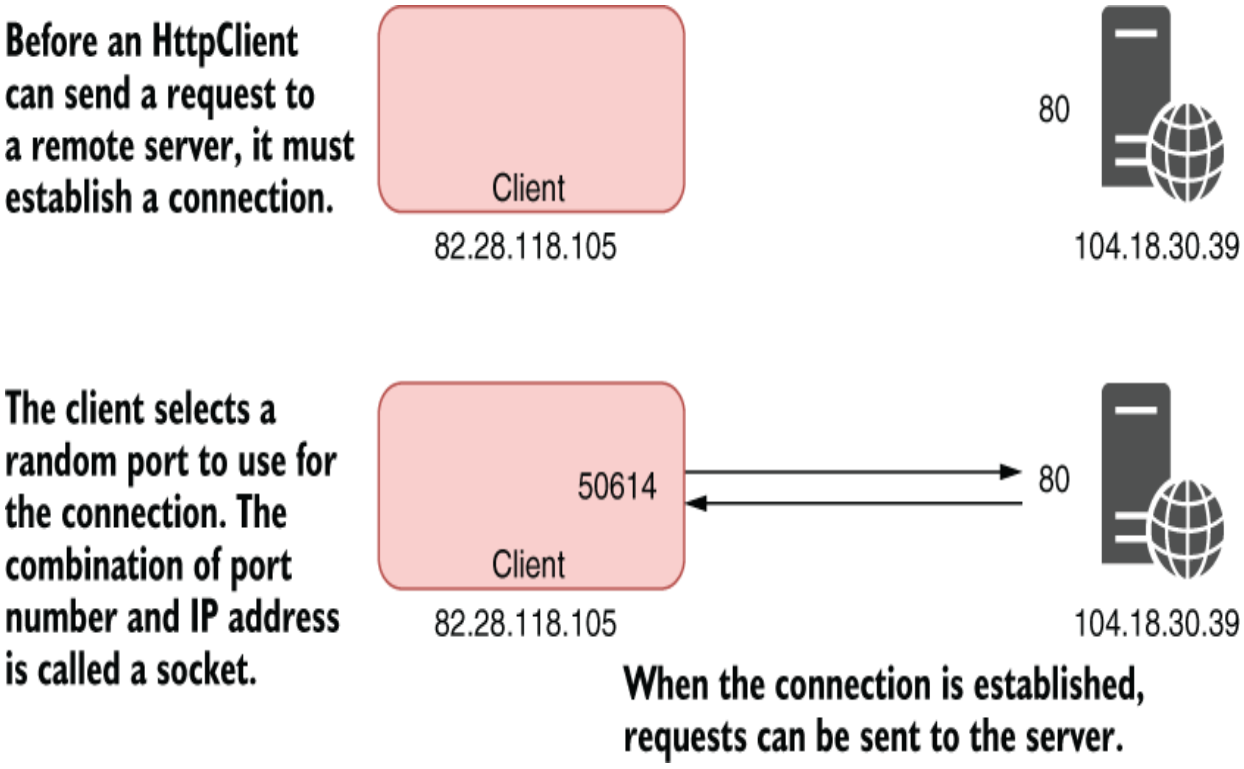


Figure 33.1 To create a connection, a client selects a random port and connects to the HTTP server's port and IP address. The client can then send HTTP requests to the server.

WARNING Do not use `HttpClient` as it's shown in listing 33.1. Using it this way could cause your application to become unstable, as you'll see shortly.

Listing 33.1 The incorrect way to use `HttpClient`

```
WebApplicationBuilder builder = WebApplication.CreateBuilder(args);
WebApplication app = builder.Build();
app.MapGet("/", async () =>
{
    using HttpClient client = new HttpClient();                    ❶
```