


initiates a request to the remote server.

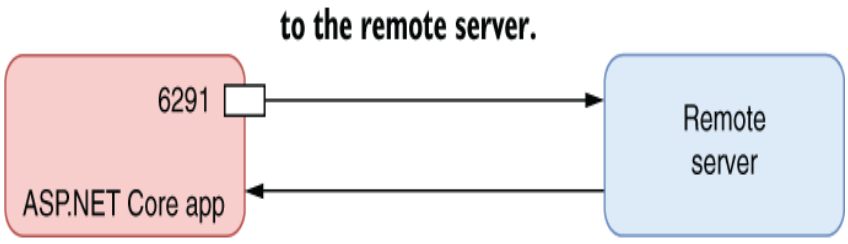

3. When a response is received, the application disposes of the HttpClient and starts to close the connection.

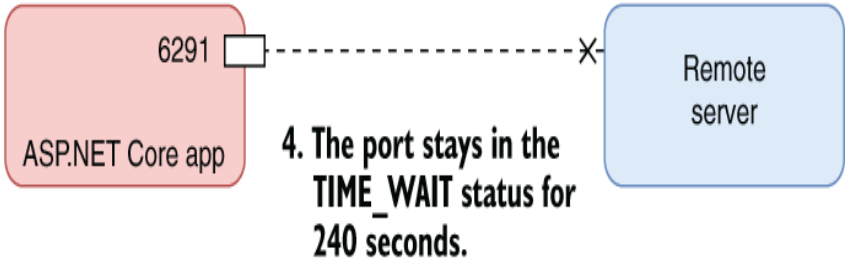

5. When the application wants to send another request, it creates a new HttpClient.

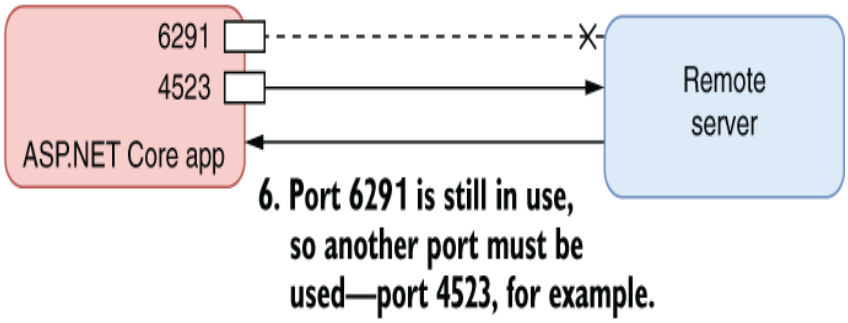

7. With sufficient numbers of requests, the machine running your app can run out of ports, as they're all stuck in TIME_WAIT, and you can no longer send or receive new requests.

