

using the ExchangeRatesClient.

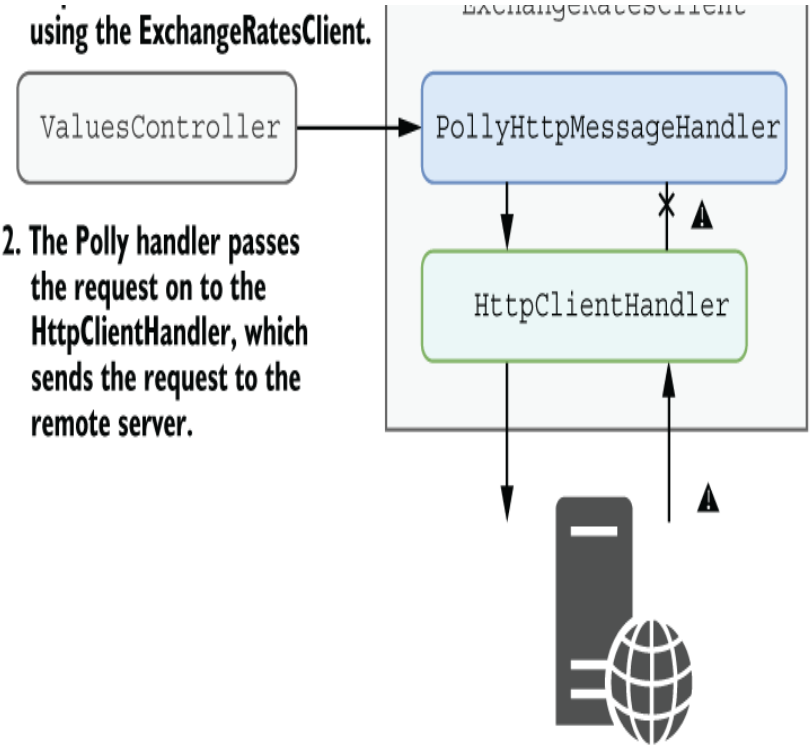


2. The Polly handler passes the request on to the HttpClientHandler, which sends the request to the remote server.

3. The remote server returns an error code, indicating a temporary error. This passes back through the handler pipeline and is intercepted by the Polly handler.

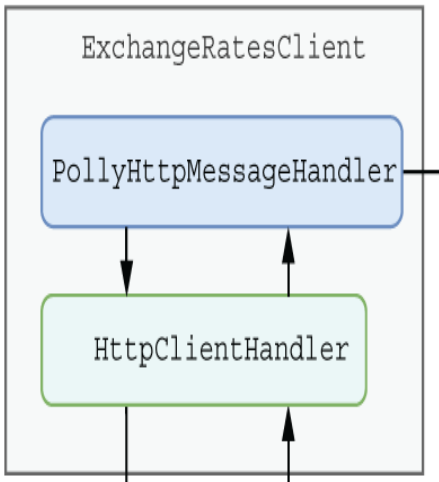

4. The Polly handler immediately (or after a small waiting period) sends the same request back down the handler pipeline and out to the remote server.



5. This time, the server returns a valid response. The response passes back through the handler pipeline, through the Polly handler, and out to the original caller.

