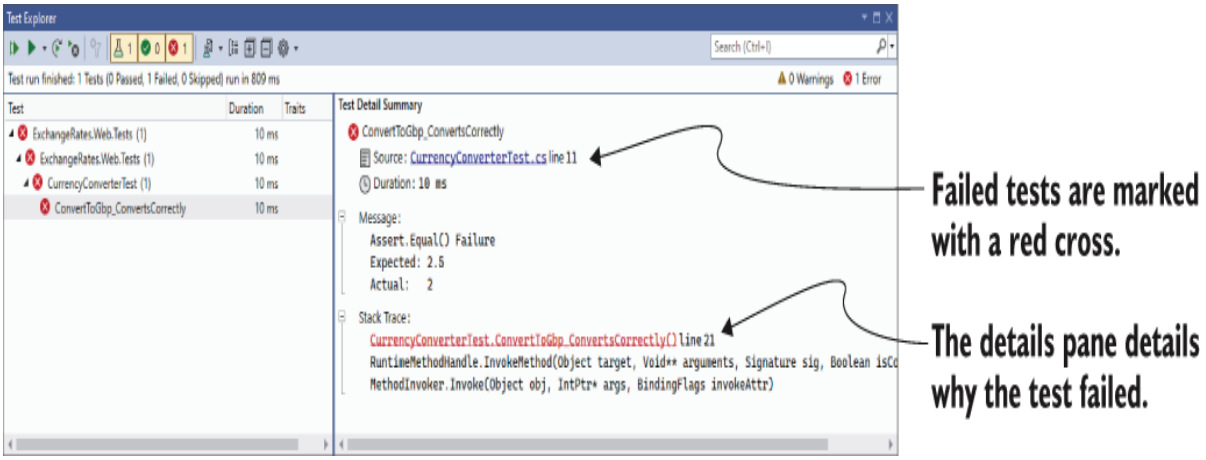


Figure 35.6 When a test fails, it's marked with a red cross in Test Explorer. Clicking the test in the left pane shows the reason for the failure in the right pane. In this case, the expected value was `2.5`, but the actual value was `2`.

TIP Alternative assertion libraries such as Fluent Assertions (https://fluentassertions.com) and Shouldly (https://github.com/shouldly/shouldly) allow you to write your assertions in a more natural style, such as `actual.Should().Be(expected)`. These libraries are optional, but I find they make tests more readable and error messages easier to understand.

In listing 35.4 you chose specific values for `value`, `exchangeRate`, and `decimalPlaces` to test the happy path. But this is only one set of values in an infinite number of possibilities, so you probably should test at least a few different combinations. One way to achieve this would be to copy and paste the test multiple times, tweak the parameters, and change the test method name to make it unique. xUnit provides an alternative way to achieve the same thing without requiring so much duplication.

NOTE The names of your test class and method are used throughout the test framework to describe your test. You can customize how these are displayed in