If you run this `[Theory]` test using `dotnet test` or Visual Studio, it will show up as three separate tests, one for each set of `[InlineData]`, as shown in figure 35.7.

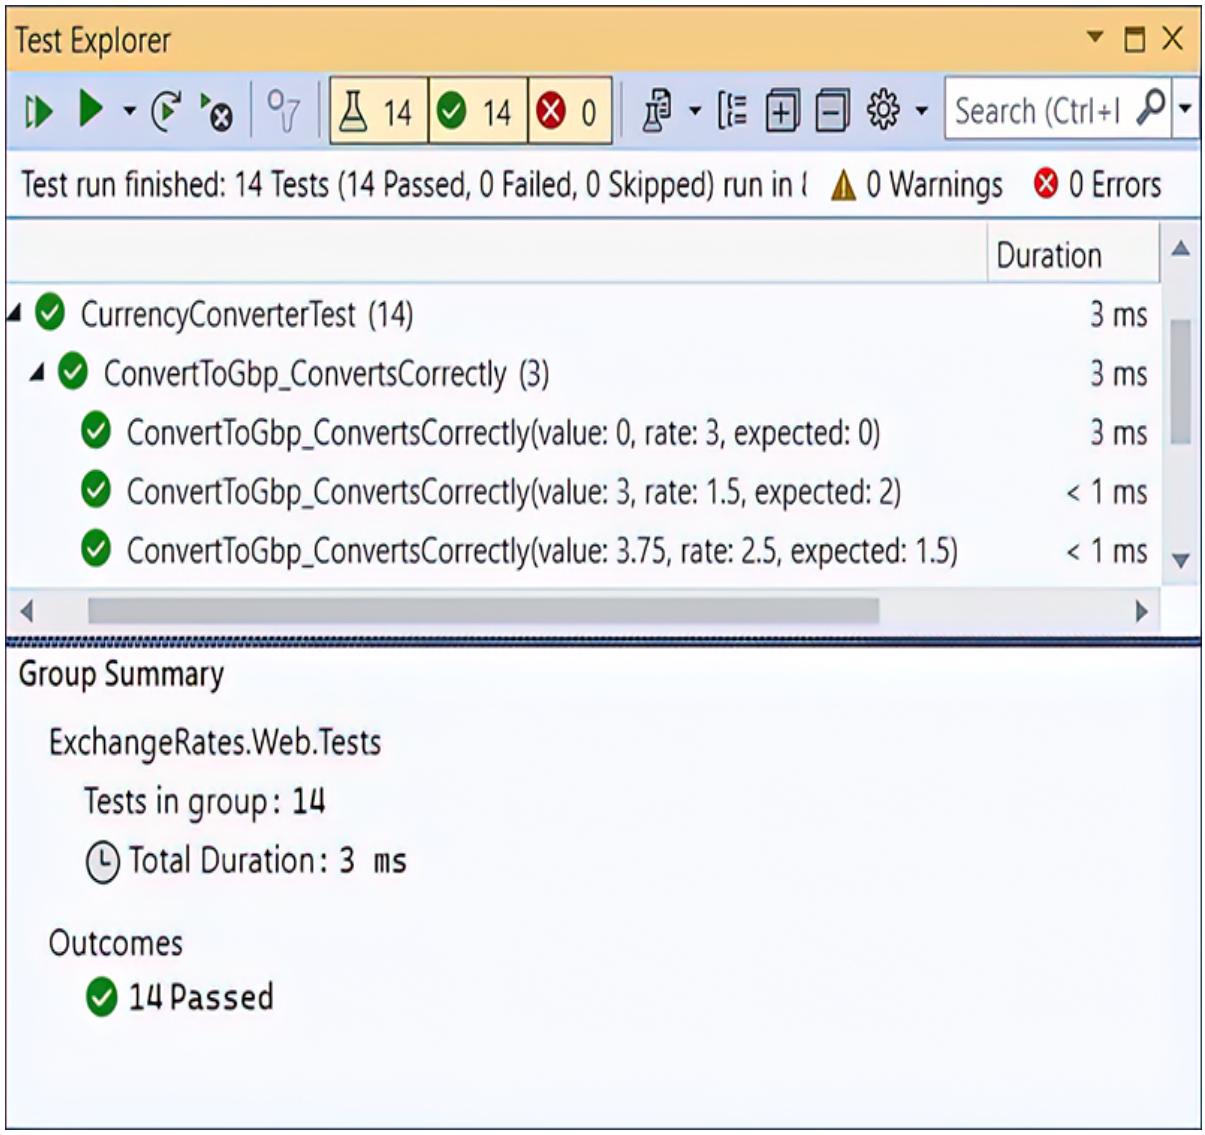


Figure 35.7 Each set of parameters in an `[InlineData]` attribute for a `[Theory]` test creates a separate test run. In this example, a single `[Theory]` has three `[InlineData]` attributes, so it creates three tests, named according to the method name and the provided parameters.