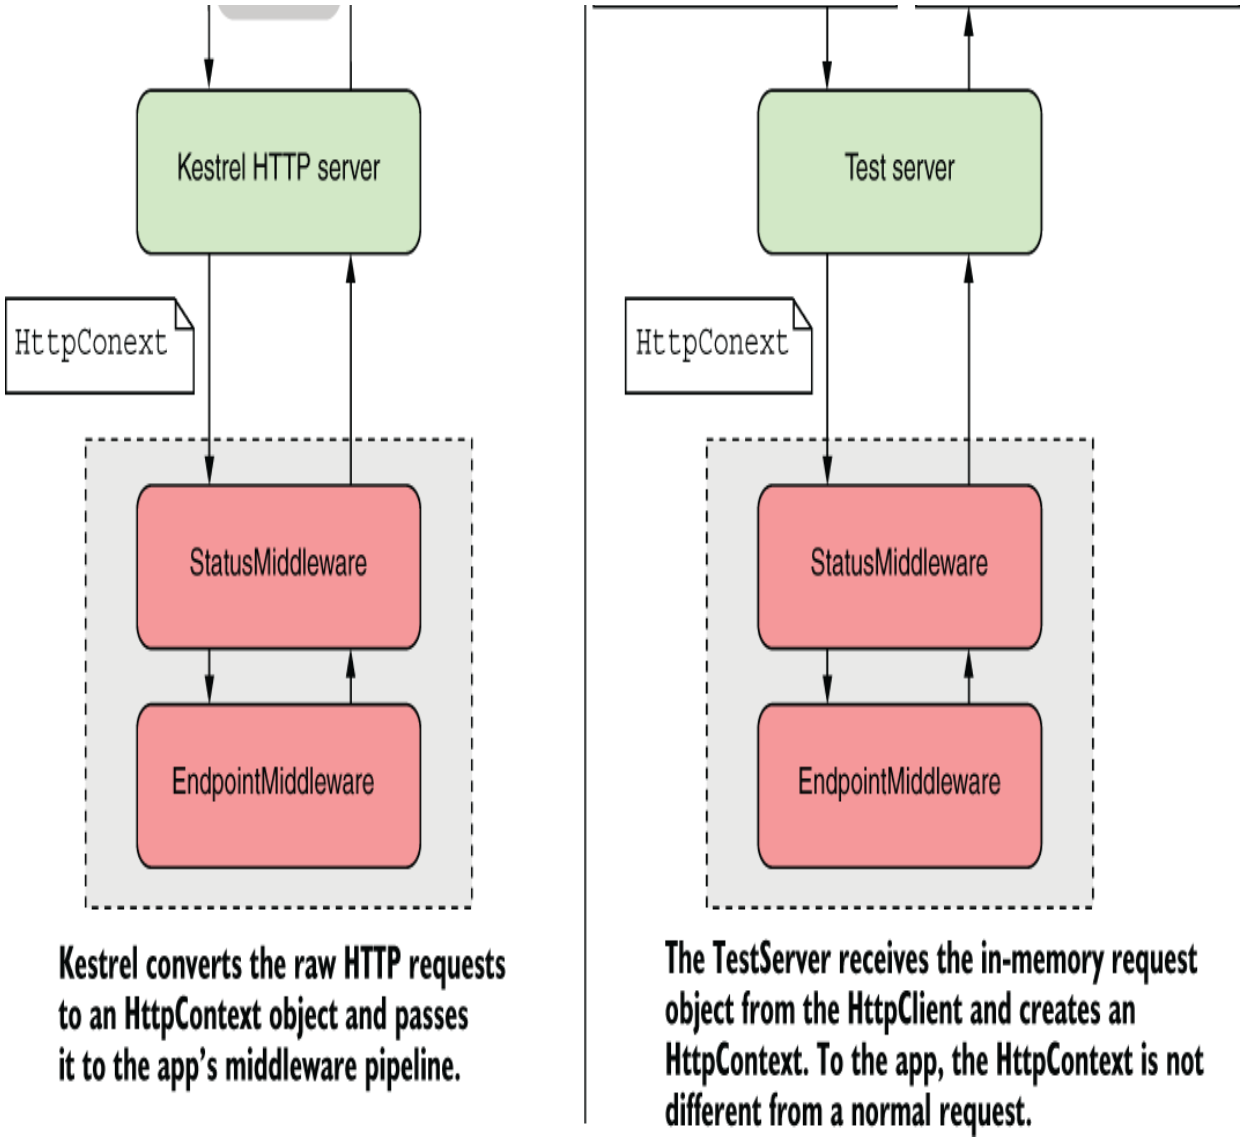


Figure 36.1 When your app runs normally, it uses the Kestrel server. This listens for HTTP requests and converts the requests to an `HttpContext`, which is passed to the middleware pipeline. The `TestServer` doesn't listen for requests on the network. Instead, you use an `HttpClient` to make in-memory requests. From the point of view of the middleware, there's no difference.

It even exposes an `HttpClient` that you can use to send requests to the test app. You can interact with the `HttpClient` as though it were