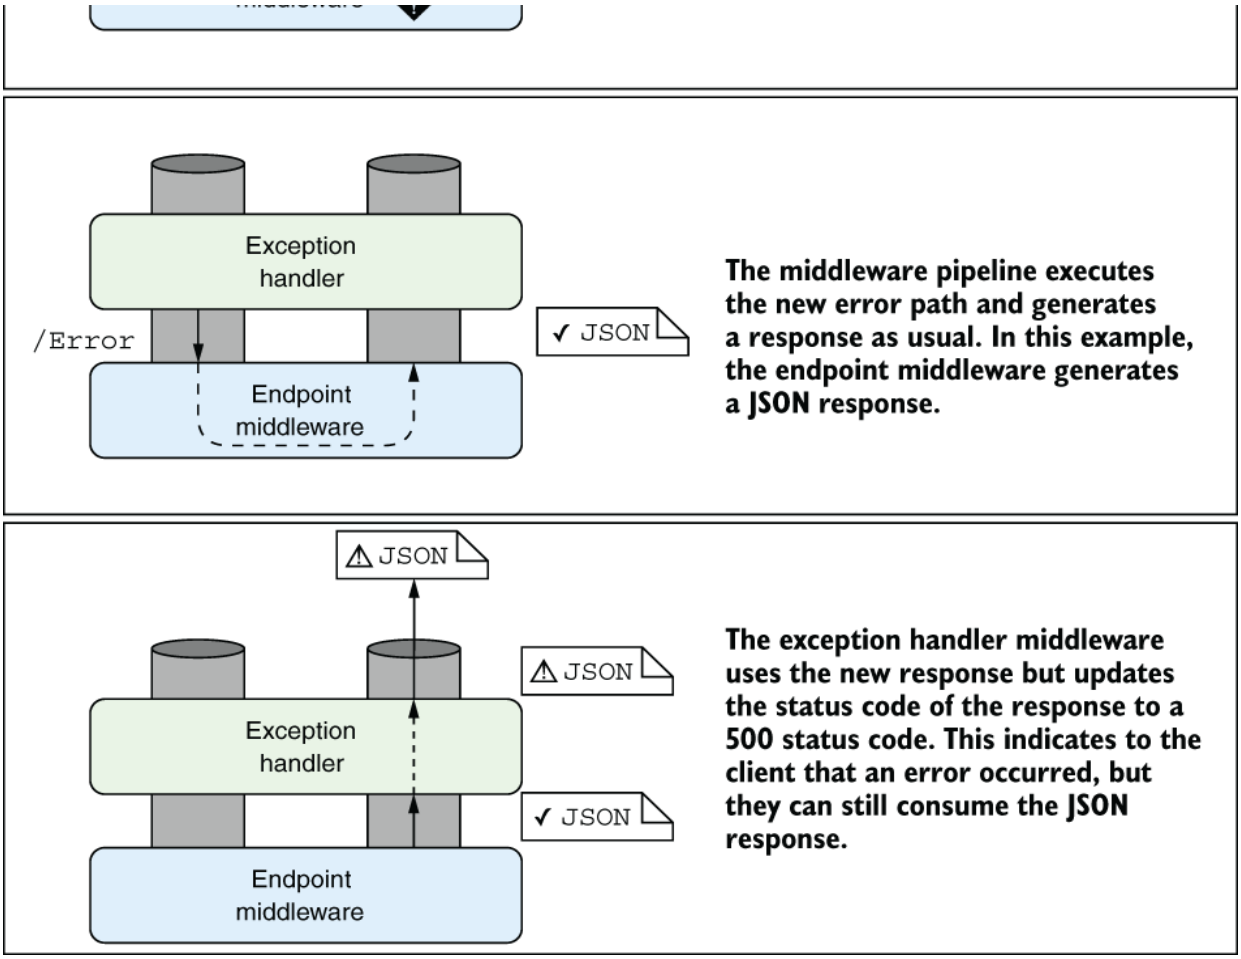


Figure 4.18 `ExceptionHandlerMiddleware` handling an exception to generate a JSON response. A request to the `/` path generates an exception, which is handled by the middleware. The pipeline is reexecuted, using the `/error` path to generate the JSON response.

The sequence of events when an unhandled exception occurs somewhere in the middleware pipeline (or in an endpoint) after `ExceptionHandlerMiddleware` is as follows:

1. A piece of middleware throws an exception.
2. `ExceptionHandlerMiddleware` catches the exception.