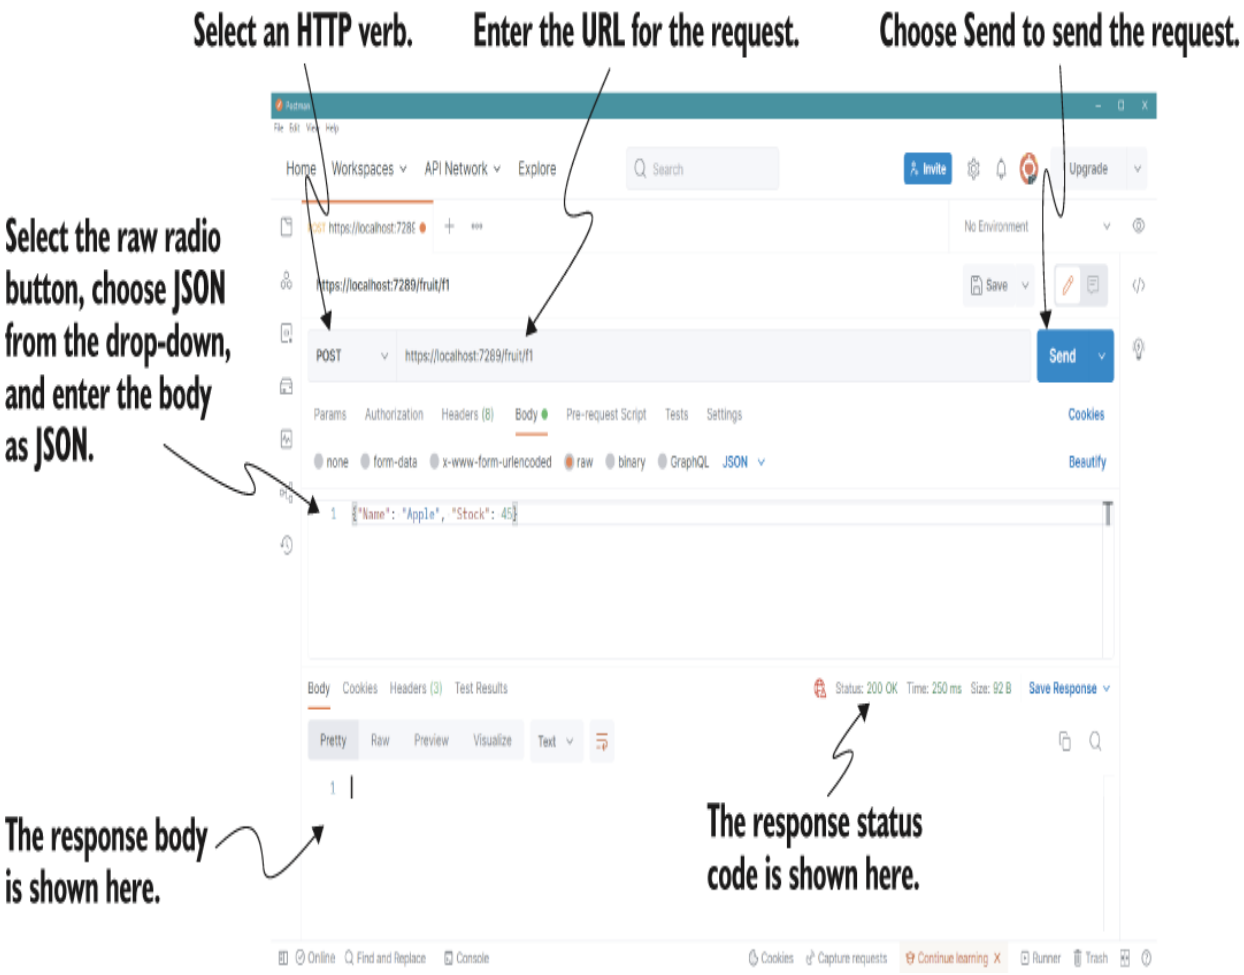



**Figure 5.3 Sending a `POST` request with Postman. The minimal API automatically deserializes the JSON in the request body to a `Fruit` instance before calling the endpoint handler.**

Minimal APIs leave you free to organize your endpoints any way you choose. That flexibility is often cited as a reason to *not* use them, due to the fear that developers will keep all the functionality in a single file, as in most examples (such as listing 5.2). In practice, you'll likely want to extract your endpoints to separate files so as to modularize them and make them easier to understand. Embrace that urge; that's the way they were intended to be used!

Now you have a simple API, but if you try it out, you'll quickly run into scenarios in which your API seems to break. In section 5.3 you learn how to