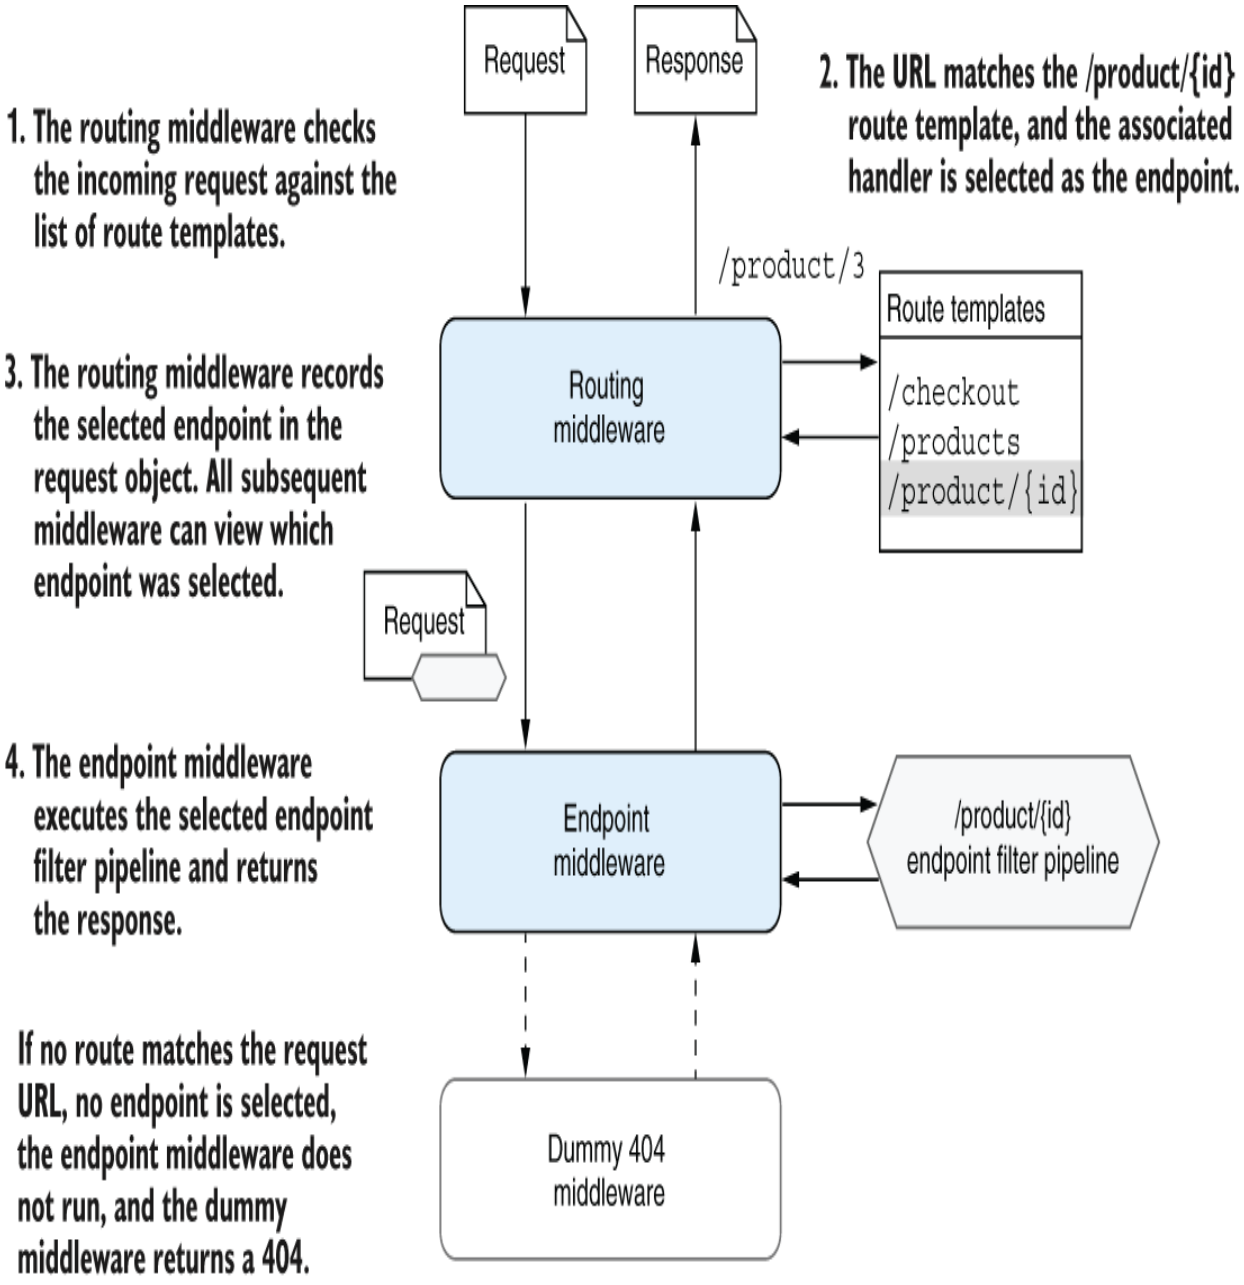


Figure 6.3 Endpoint routing uses a two-step process. The `RoutingMiddleware` selects which endpoint to execute, and the `EndpointMiddleware` executes it. If the request URL doesn't match a route template, the endpoint middleware won't generate a response.

If the request URL *doesn't* match a route template, the `RoutingMiddleware` doesn't select an endpoint, but the request still