the next section we'll look at some of the many features available with route templates.

6.3 Exploring the route template syntax

So far in this book we've looked at simple route templates consisting of fixed values, such as `/person` and `/test`, as well as using a basic route parameter such as `/fruit/{id}`. In this section we explore the full range of features available in route templates, such as default values, optional segments, and constraints.

6.3.1 Working with parameters and literal segments

Route templates have a rich, flexible syntax. Figure 6.5, however, shows a simple example, similar to ones you've already seen.

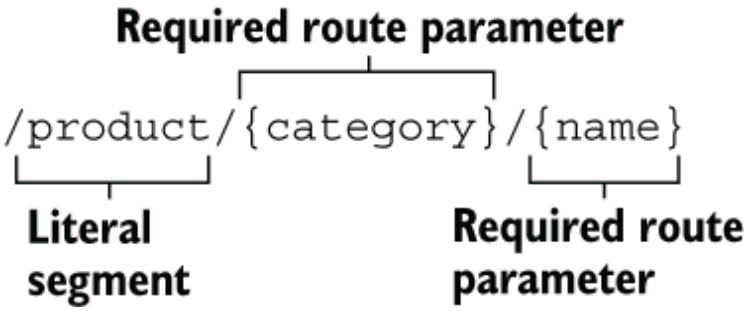


Figure 6.5 A simple route template showing a literal segment and two required route parameters

The routing middleware parses a route template by splitting it into *segments*. A segment is typically separated by the `/` character, but it can be any valid character.