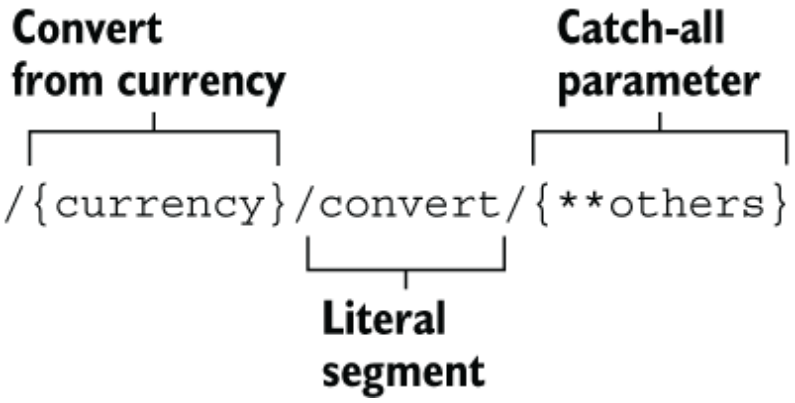


Figure 6.7 You can use catch-all parameters to match the remainder of a URL. Catch-all parameters may include the `/` character or may be an empty string.

You can declare catch-all parameters by using either one or two asterisks inside the parameter definition, as in `{*others}` and `{**others}`. These parameters match the remaining unmatched portion of a URL, including any slashes or other characters that aren't part of earlier parameters. They can also match an empty string. For the `USD/convert/GBP/EUR` URL, the value of the route value `others` would be the single string `"GBP/EUR"`.

TIP Catch-all parameters are greedy and will capture the whole unmatched portion of a URL. Where possible, to avoid confusion, avoid defining route templates with catch-all parameters that overlap other route templates.

The one- and two-asterisk versions of the catch-all parameter behave identically when routing an incoming request to an endpoint. The difference occurs only when you're *generating* URLs (which we'll cover in the next section): the one-asterisk version URL encodes forward slashes, and the two-asterisk version doesn't. Typically, the round-trip behavior of the two-asterisk version is what you want.