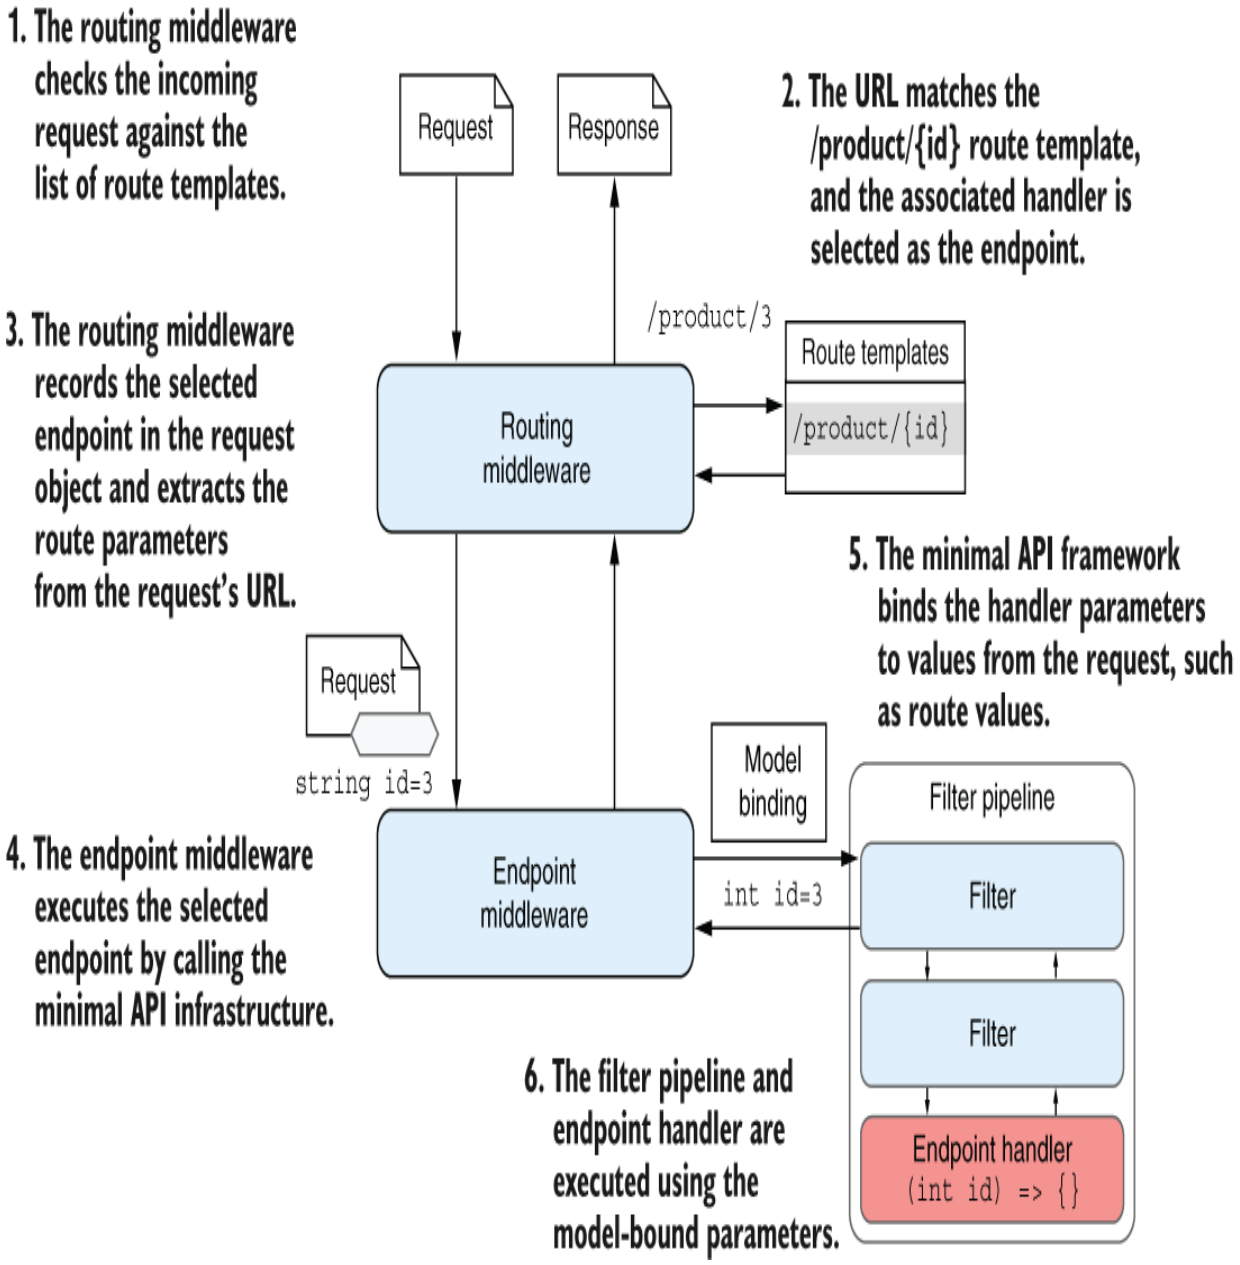


Figure 7.1 The `RoutingMiddleware` matches the incoming request to an endpoint and extracts the route parameters as `strings`. When the `EndpointMiddleware` executes the endpoint, the minimal API infrastructure uses model binding to create the arguments required to execute the endpoint handler, converting the `string` route values to real argument types such as `int`.