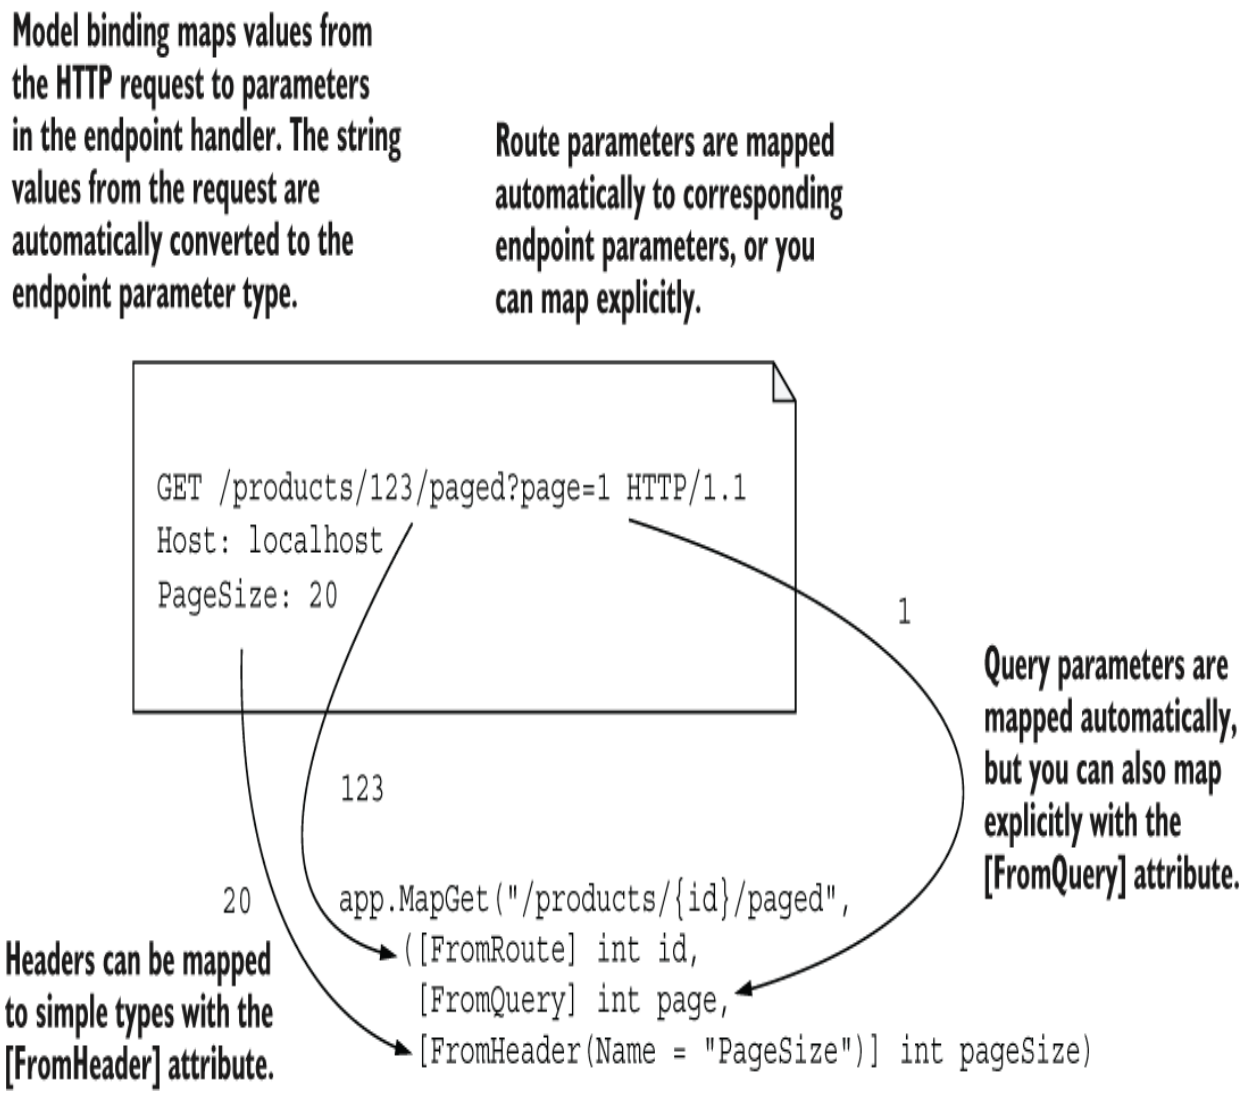


Figure 7.2 Model binding an HTTP get request to an endpoint. The `[FromRoute]`, `[FromQuery]`, and `[FromHeader]` attributes force the endpoint parameters to bind to specific parts of the request. Only the `[FromHeader]` attribute is required in this case; the route parameter and query string would be inferred automatically.

The `[From*]` attributes override ASP.NET Core's default logic and forces the parameters to load from a specific binding source. Listing 7.1 demonstrates three possible `[From*]` attributes: