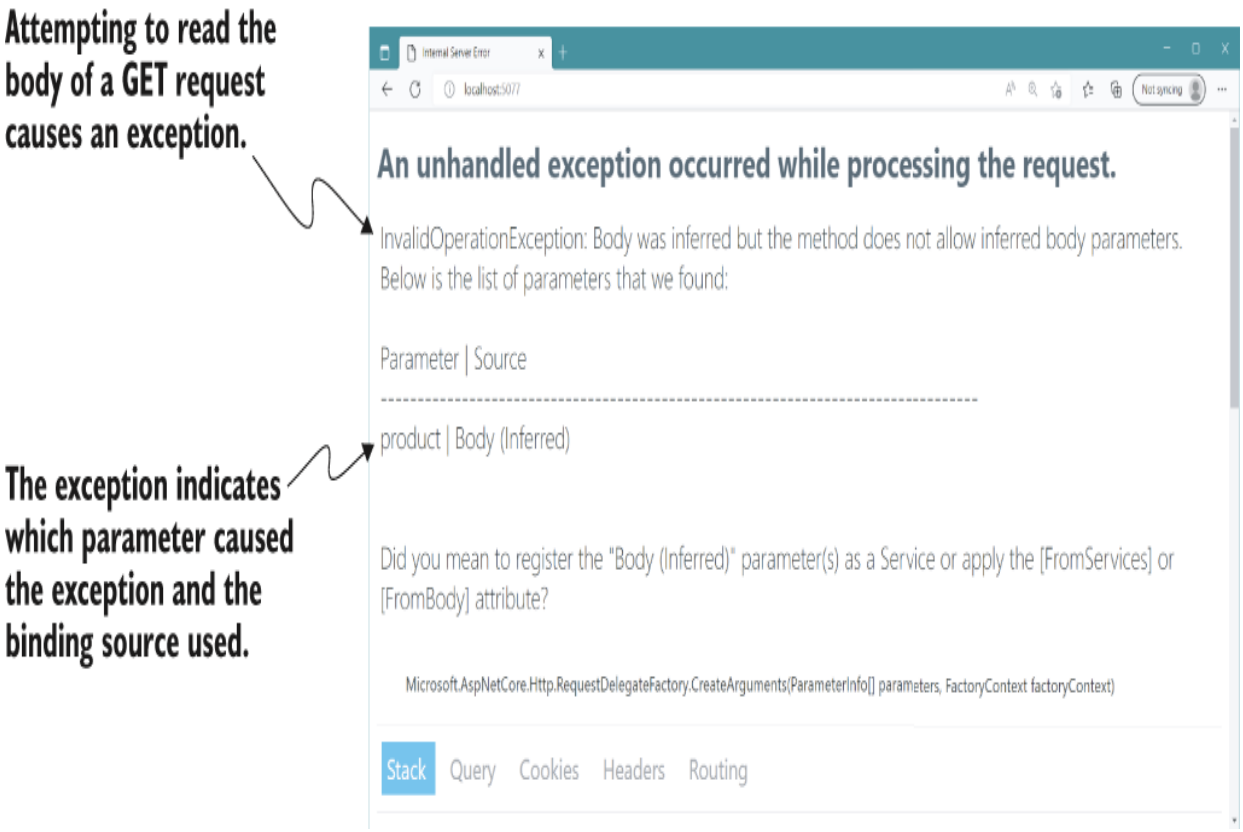


Figure 7.4 If you try to bind the body to a parameter for a `GET` request, you'll get an exception when your app receives its first request.

We've discussed binding of both simple types and complex types. Unfortunately, now it's time to admit to a gray area: arrays, which can be simple types *or* complex types.

7.4 Arrays: Simple types or complex types?

It's a little-known fact that entries in the query string of a URL don't have to be unique. The following URL is valid, for example, even though it includes a duplicate `id` parameter:

```
/products?id=123&id=456
```