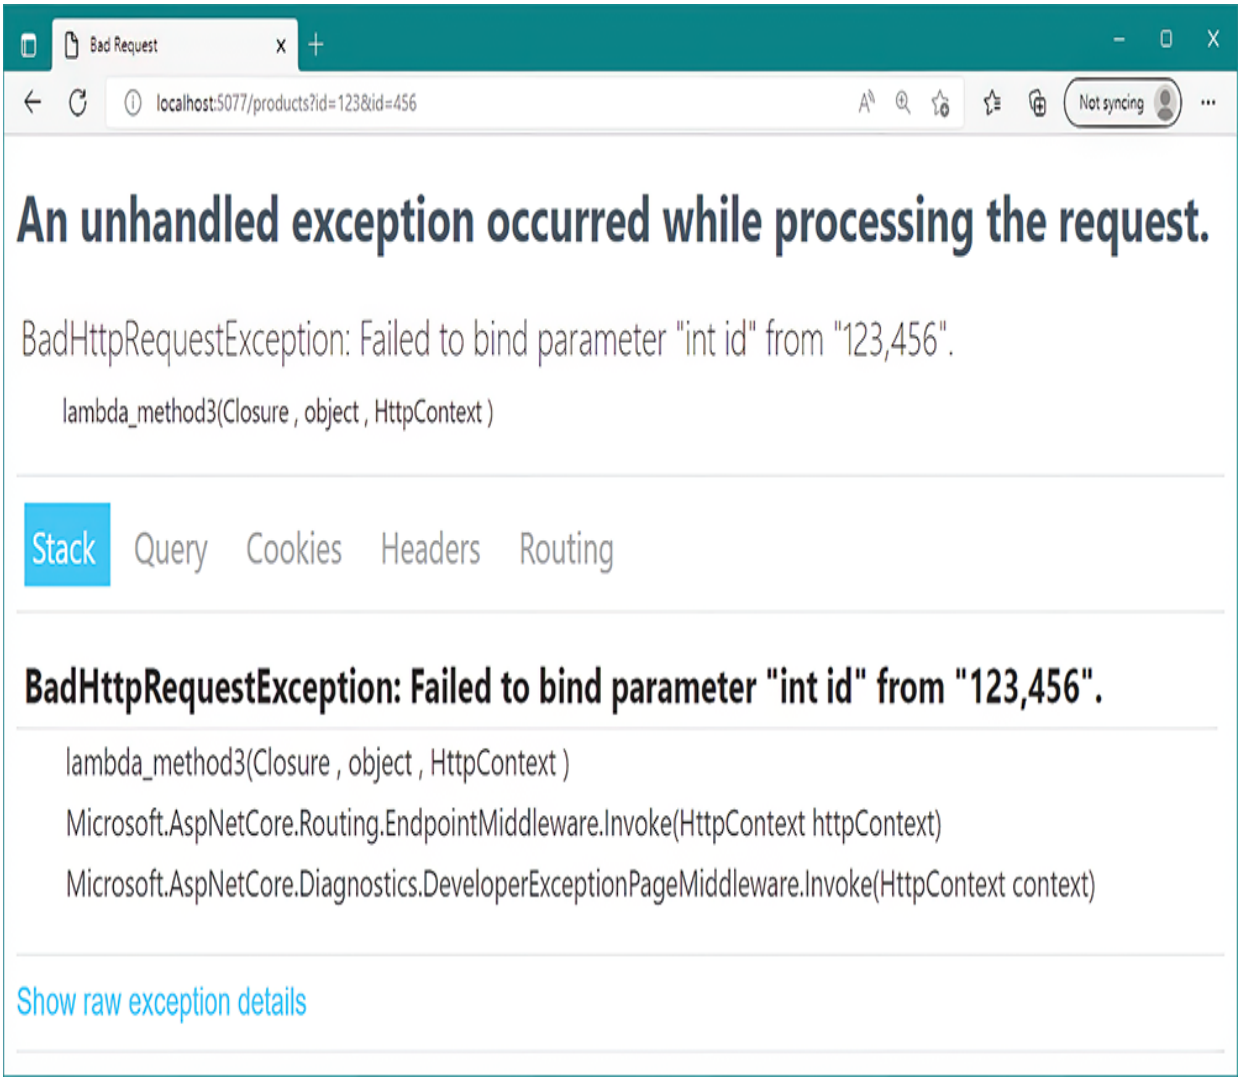


Figure 7.5 Attempting to bind a handler with a signature such as `(int id)` to a query string that contains `?id=123&id=456` causes an exception at runtime and a `400 Bad Request` response.

If you want to handle query strings like this one, so that users can optionally pass multiple possible values for a parameter, you need to use arrays. The following listing shows an example of an endpoint that accepts multiple `id` values from the query string and binds them to an array.

Listing 7.4 Binding multiple values for a parameter in a query string to an array