given that the route parameter is marked optional, requests to both `/stock/123` and `/stock` will invoke the handler. But in the latter case, there'll be no `id` route value, and you'll get an error like the one shown in figure 7.6.

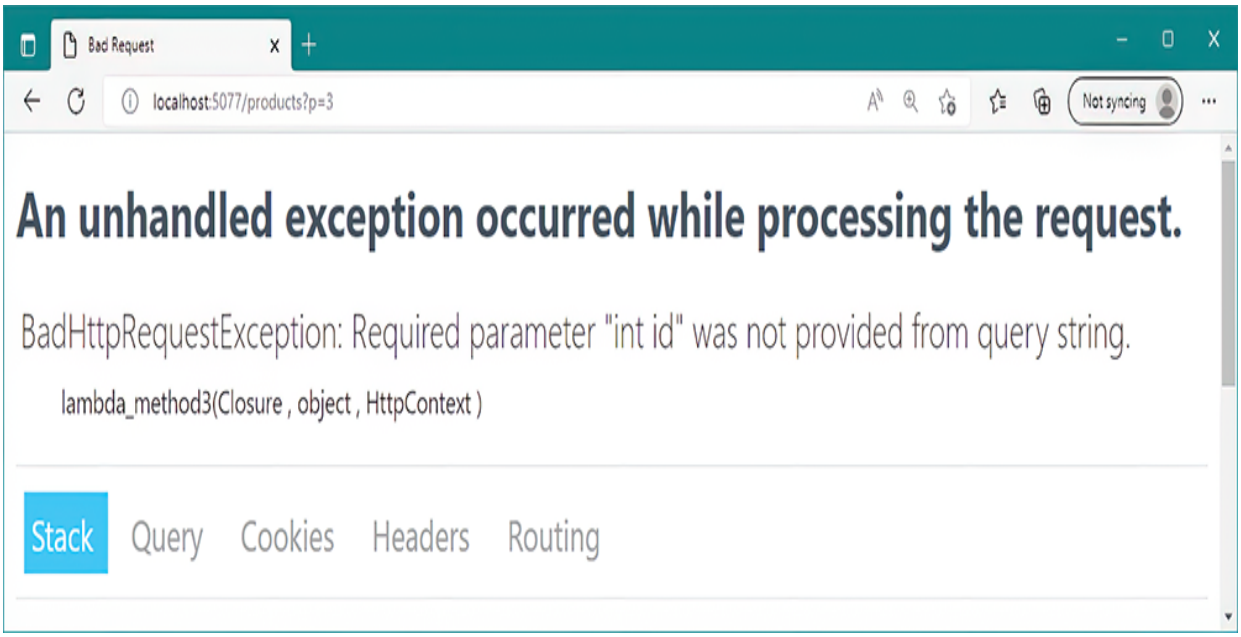


Figure 7.6 If a parameter can't be bound because a value is missing, the `EndpointMiddleware` throws an exception and returns a `400 Bad Request` response. The endpoint handler doesn't run.

The way around this problem is to mark the *handler parameter* as optional by making it nullable. Just as `?` signifies optional in route templates, it signifies optional in the handler parameters. You can update the handler to use `int?` instead of `int`, as shown in the following listing, and the endpoint will handle both `/stock/123` and `/stock` without errors.

Listing 7.5 Using optional parameters in endpoint handlers

```
WebApplicationBuilder builder = WebApplication.CreateBuilder(args);
WebApplication app = builder.Build();
```