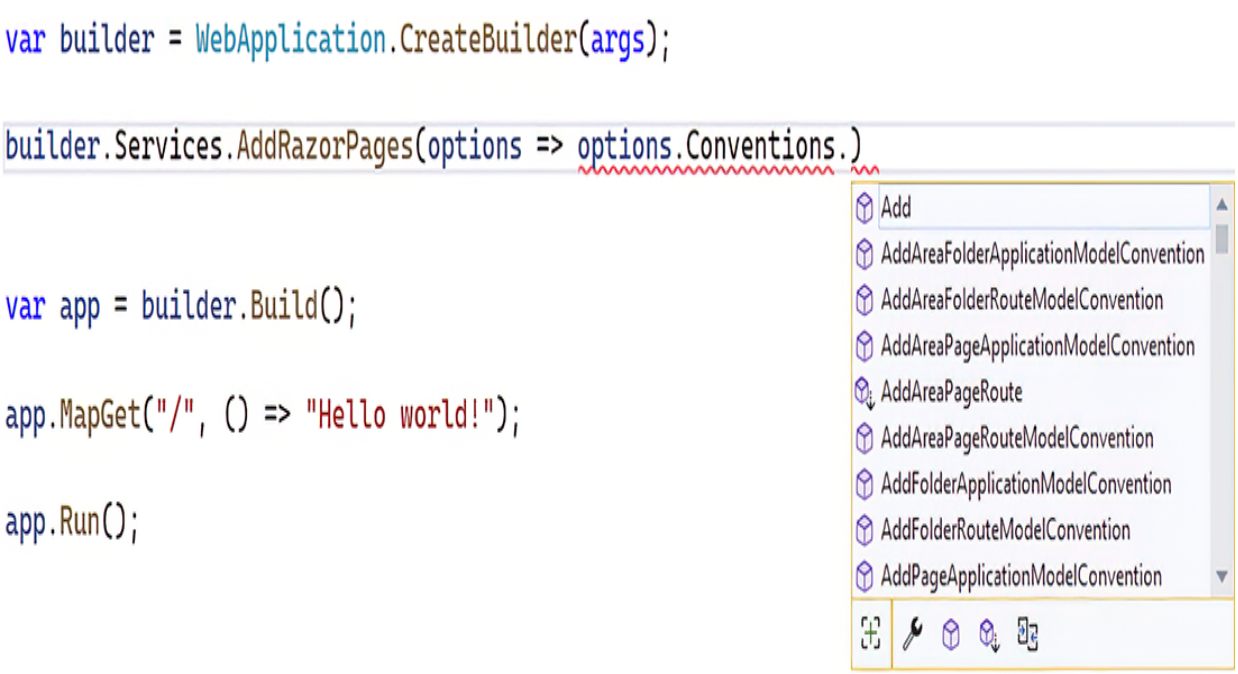


Figure 8.7 Configuring services when adding them to the service collection. The `AddRazorPages()` function allows you to configure a wealth of the internals of the framework.

It's all very well registering services with the DI container, but the important question is how to use the container to get an instance of a registered service. In section 8.5 we look at two possible ways to access these services and discuss when you should choose one over the other.

8.5 Using services from the DI container

In a minimal API application, you have two main ways to access services from the DI container:

- Inject services into an endpoint handler.
- Access the DI container directly in Program.cs.