To configure the application completely, you need to register an `IEmailSender` implementation and all its dependencies with the DI container, as shown in figure 9.2.

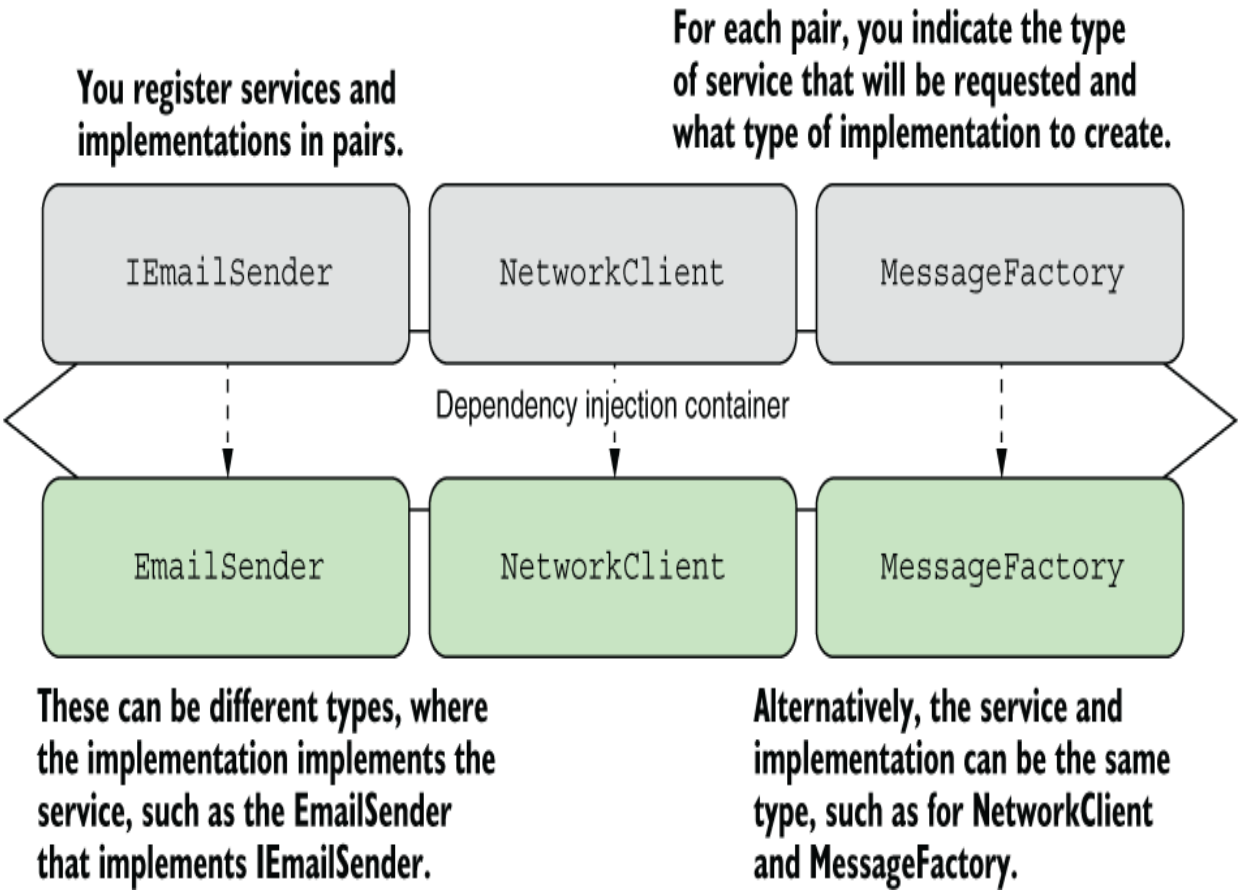


Figure 9.2 Configuring the DI container in your application involves telling it what type to use when a given service is requested, such as "Use `EmailSender` when `IEmailSender` is required."

Configuring DI consists of making a series of statements about the services in your app, such as the following:

- When a service requires `IEmailSender`, use an instance of `EmailSender`.