9.3.1 Injecting multiple implementations of an interface

Suppose that you want to send a message using each of the `IMessageSender` implementations whenever a new user registers so that they get an email, an SMS text, and a Facebook message, as shown in figure 9.4.

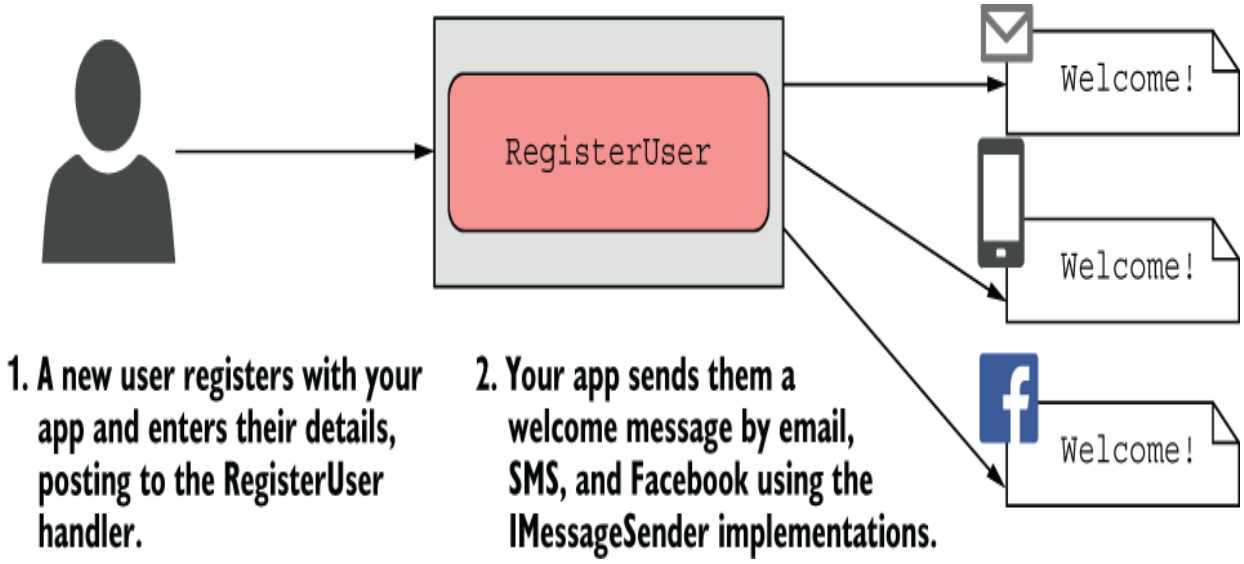


Figure 9.4 When a user registers with your application, they call the `RegisterUser` handler. This handler sends them an email, an SMS text, and a Facebook message using the `IMessageSender` classes.

The easiest way to achieve this goal is to register all the service implementations in your DI container and have it inject one of each type into the `RegisterUser` endpoint handler. Then `RegisterUser` can use a simple `foreach` loop to call `SendMessage()` on each implementation, as shown in figure 9.5.