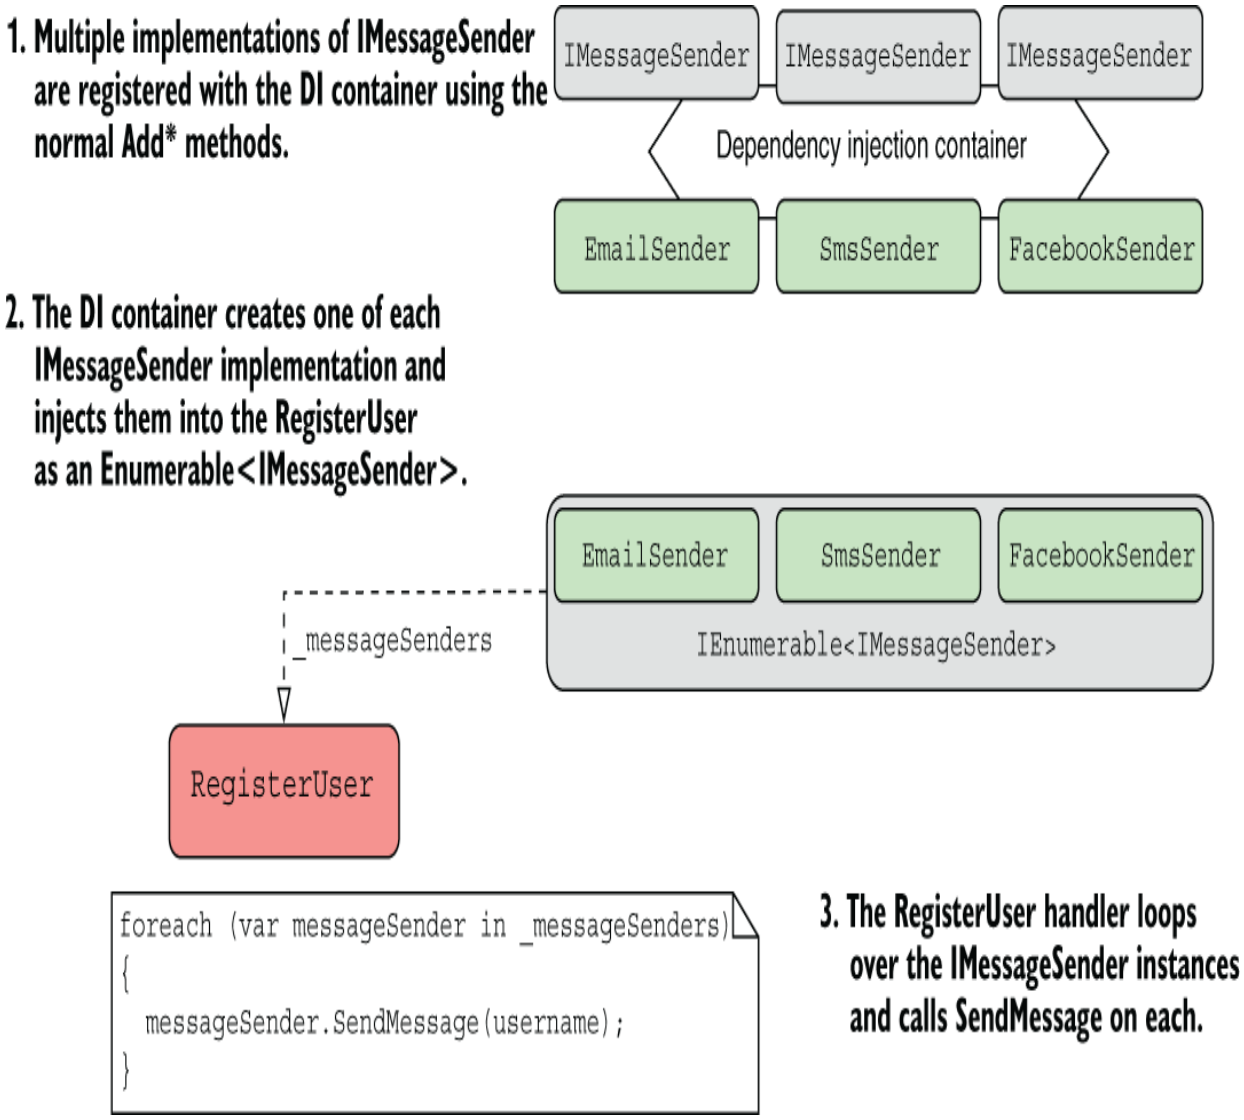


Figure 9.5 You can register multiple implementations of a service with the DI container, such as `IEmailSender` in this example. You can retrieve an instance of each of these implementations by requiring `IEnumerable<IMessageSender>` in the `RegisterUser` handler.

You register multiple implementations of the same service with a DI container in exactly the same way as for single implementations, using the `Add*` extension methods as in this example: