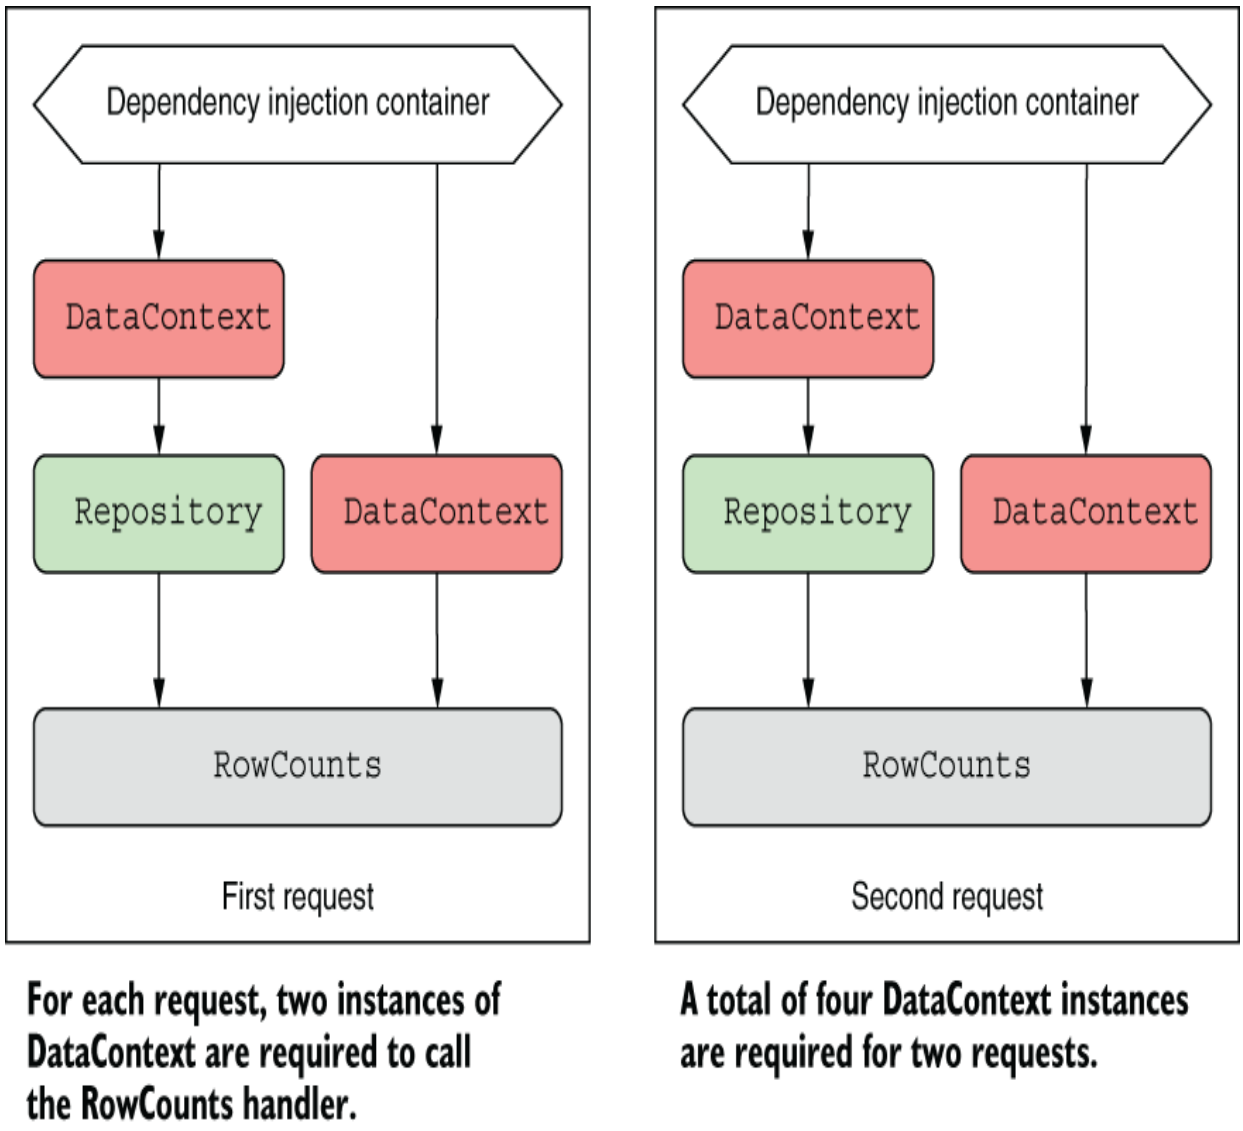


Figure 9.6 The DI container uses two instances of `DataContext` for each request. Depending on the lifetime with which the `DataContext` type is registered, the container might create one, two, or four instances of `DataContext`.

The `RowCounts` handler retrieves the value of `RowCount` returned from both `Repository` and `DataContext` and then returns them as a string, similar to the code in listing 9.12. The sample code associated with